


## BNS 819-B02-L16-61-16-10-FD BNS03NM



1) Reference edge 2) Function indicator FD/FE/LL

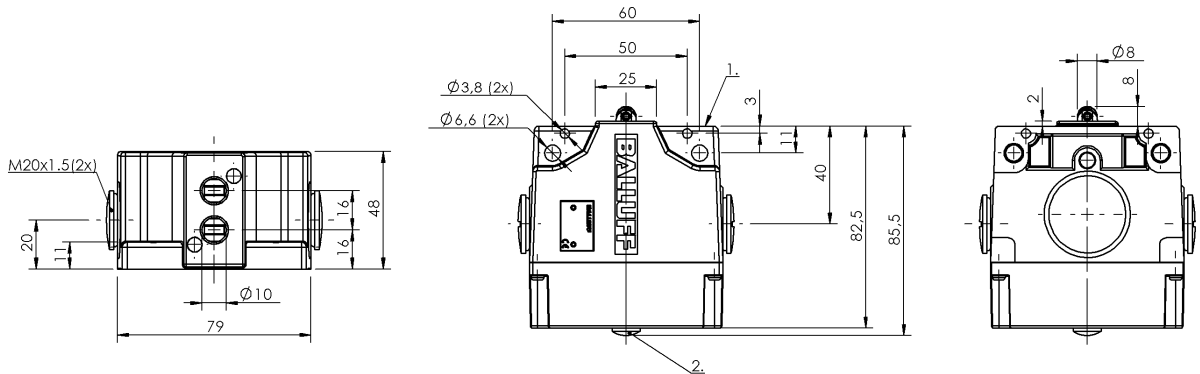

### Display/Operation

Function indicator 1-2. Switch position: FD - 6...  
60 V

### Electrical connection

Connection type 1-2. Switch position: Screw  
terminal

### Electrical data

Continuous current 1-2. Switch position: 6 A  
Rated operating voltage  $U_e$  1-2. Switch position: 250 VAC  
Switching function mechanical Double-interrupting  
galvanically isolated  
One NO and one NC  
Dual changeover  
Switching rate 1-2. Switch position: 300/min

### Environmental conditions

Ambient temperature -5...85 °C  
Protection type IEC 60529 IP67

### Functional safety

B10d BSE 30.0: 30 mil. switching  
cycles  
Diagnostic coverage 0.0 %  
Functional safety no  
Mission Time 20 a

### General data

Approval/Conformity CE  
CCC  
CSA  
Basic standard IEC 60947-5-1  
Operating principle 1-2. Switch position:  
mechanical  
Version Snap contact

### Material

Housing material Aluminum  
Material contacts 1-2. Switch position: Fine silver,  
gold plated  
Plunger material 1-2. Switch position: Stainless  
steel (1.4034)  
Surface protection anodized

### Mechanical data

Approach direction longitudinal, parallel to  
attachment surface  
Approach speed 1-2. Switch position: 120 m/min  
Distance cam - reference edge 1-2. Switch position: 4.50...  
5.00 mm  
Flange, feed-through None  
Installation Vertical  
Life expectancy mechanical 1-2. Switch position: 30 mil.  
switching operations  
Number of switching positions 2x Roller bearing  
Plunger style 1-2. Switch position: Roller  
bearing  
Switch actuation force 1-2. Switch position: 20 N  
Switching element 1-2. Switch position: BSE 30.0

## BNS 819-B02-L16-61-16-10-FD BNS03NM

### Range/Distance

Reproducibility

1-2. Switch position:  $\pm 0.01$  mm

Specification of the MTTF value and the B10d value do not represent any binding quality and/or life expectancy guarantees.

Note that the products listed here are not themselves safety components according to the Machine Directive 2006/42/EG Article 2 c. It is however possible to create corresponding structures with a high Performance Level per EN 13849-1 by means of two-channel utilization.

### Wiring Diagram

BSE 30.0

