




1376357-3 Product Details

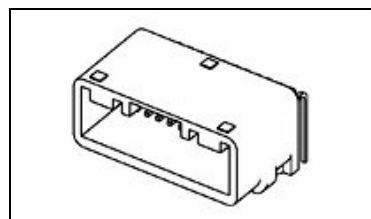

1376357-3

TE Internal Number: 1376357-3

Active

0.025 Series and Hybrid Connectors and Contacts

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Product Series = 025/090
- Wire-to-Board
- Applies To Printed Circuit Board
- Connector
- Connector Assembly

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) | [Request Sample](#) | [Find Similar Products](#) | [Buy Product](#)

Documentation & Additional Information

Documents are temporarily unavailable. We are working hard to correct the problem. Please try again later.

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Series = 025/090
- [Product Type](#) = Connector
- Connector Type = Connector Assembly
- [PCB Mounting Orientation](#) = Right Angle
- PCB Mount Retention = With
- PCB Mount Retention Type = Tapping Screw
- Sealed = No
- PCB Mount Alignment = With
- PCB Mount Alignment Type = Mounting Holes

Mechanical Attachment:

- Contact Retention = Without
- Mating Retention Type = Latching
- Panel Mount Retention = Without

Electrical Characteristics:

- Operating Voltage Reference = DC
- Operating Voltage (VDC) = 12

Termination Features:

- Termination Method to Wire/Cable = Solder
- Termination Method to PC Board = Through Hole - Solder

Dimensions:

- Tab Width (mm [in]) = 0.64 [0.025], 2.3 [0.091]
- Tail Length (mm [in]) = 4 [0.157]
- PCB Thickness, Recommended (mm [in]) = 1.20 [0.048], 1.60 [0.063]
- Length (X-Axis) (mm [in]) = 19.50 [0.767]
- Width (Z-Axis) (mm [in]) = 42.50 [1.6732]
- Profile Height (Y-Axis) (mm [in]) = 17.60 [0.6929]

Body Features:

- Mating Retention = With

Contact Features:

- Contact Type = Tab
- Multiple Contact Types = With
- Contact Base Material = Brass
- [Contact Mating Area Plating \(Signal\)](#) = Pre-Tin
- [Contact Mating Area Plating \(Power\)](#) = Pre-Tin
- Contact Plating, Termination Area, Material = Pre-Tin
- Contact Plating, Termination Area, Thickness (µm [µin]) = 0.8 - 1.5 [31.496 - 59.055]

Housing Features:

- Connector Style = Receptacle
- [Housing Material](#) = PBT - GF
- [Housing Color](#) = Natural
- Mating Alignment = With
- Mating Alignment Type = Polarization

Configuration Features:

- [Number of Positions](#) = 26
- Number of Sections = 1
- Number of Positions/Section = 20+6
- Number of Rows = 2
- Strain Relief = Without
- GET 0.64 Connector System = No

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Environmental:

- Operating Temperature (°C [°F]) = -30 - +105 [-22 - +221]

Conditions for Usage:

- [Applies To](#) = Printed Circuit Board
- For Use With = Plug; 1376360

Operation/Application:

- Application Use = Wire-to-Board
- Contact Transmits (Typical Application) = Signal (Data)/Power

Packaging Features:

- Packaging Method = Box/Carton, Tube
- Packaging Quantity = 10

Other:

- Brand = TE Connectivity

- Underplate Material = Copper
- Underplate Material Thickness (μm [μin]) = 0.50 [19.685]
- Shunts/Shorting Bars = Without

Corporate Information

[About TE](#)
[Investors](#)
[News Room](#)
[Supplier Portal](#)
[Careers](#)
[Terms & Conditions](#)
[Privacy Policy](#)
[AODA Accessibility Policy](#)
[AODA Multi-Year Accessibility Plan](#)

Quick Links

[Distributor Inventory](#)
[Product Cross Reference](#)
[Documents & Drawings](#)
[Product Compliance Support Center](#)
[Site Map](#)

Customer Support

[Email or Chat With Us](#)
[Find a Phone Number](#)
[Knowledge Base](#)
[Manage Your Account](#)

Keep Me Informed

