




ENGLISH

Datasheet

Stock No: 503-940

RS Pro 200VA 2 Output Chassis Mounting Transformer, 9V ac

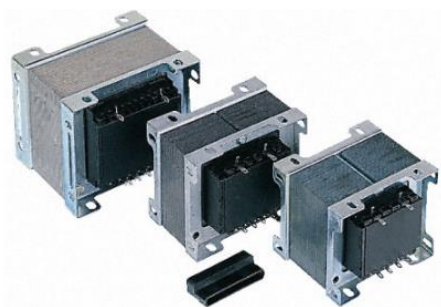

Product Details

Chassis Mount Frame 75VA to 200VA

The two independent secondary windings may be connected in series or parallel to give a wide range of output voltage and current options.

Optional terminal shrouds for 75VA and 100VA(503-928)

Laminated Frame 230Vac Primary 75VA to 200VA (Multi Tapped)

Chassis mounting frame construction low voltage mains transformers with a single 230Vac 50/60Hz primary winding.

Double section bobbin construction

Fully shrouded bobbins

Full varnish impregnation

Multi-hole frame fixing

Solder tag terminations

100% electrical and flash tested

Tested in accordance with BS3535 and EN 60 742



Specifications

Primary Voltage Rating	230V ac
Secondary Voltage Rating	9V ac
Power Rating	200VA
Number of Outputs	2
Mounting Type	Chassis
CAD Drawing	3D CAD Model
Length	100mm
Width	92mm
Depth	82mm
Dimensions	100 x 92 x 82mm
Fixing Hole Diameter	5.5 x 8.5mm
Weight	2.8kg
Minimum Operating Frequency	50Hz
Maximum Operating Frequency	60Hz