
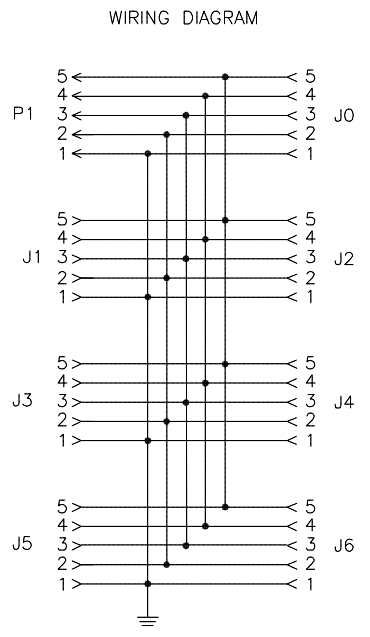


MALE (P1) CONNECTOR	FEMALE (J0) CONNECTOR	FEMALE (J1-J6) CONNECTORS	SPECIFICATIONS
	 1 = BARE (SHIELD) 2 = RED (+ V) 3 = BLACK (- V) 4 = WHITE (CAN_H) 5 = BLUE (CAN_L)	 1 = BARE (SHIELD) 2 = RED (+ V) 3 = BLACK (- V) 4 = WHITE (CAN_H) 5 = BLUE (CAN_L)	HOUSING MATERIAL/COLOR: TPU/BLACK RECEPTACLE HOUSING/PLATING: BRASS/NICKEL CONTACT CARRIERS: TPU (P1,P0), NYLON (J1-J6) CONTACT MATERIAL/PLATING: BRASS/GOLD OPERATING VOLTAGE: 35 VDC OPERATING CURRENT: 4.0 A PER CONNECTOR PROTECTION CLASS: NEMA 1,3,4,6,13 AND IEC IP67 OPERATING TEMPERATURE: -30°C to 80°C (-22°F to 176°F) LED INDICATION, FLASHING AMBER: < 12.9 V LED INDICATION, GREEN: 21.9-25.6 V LED INDICATION, AMBER: > 25.6 V

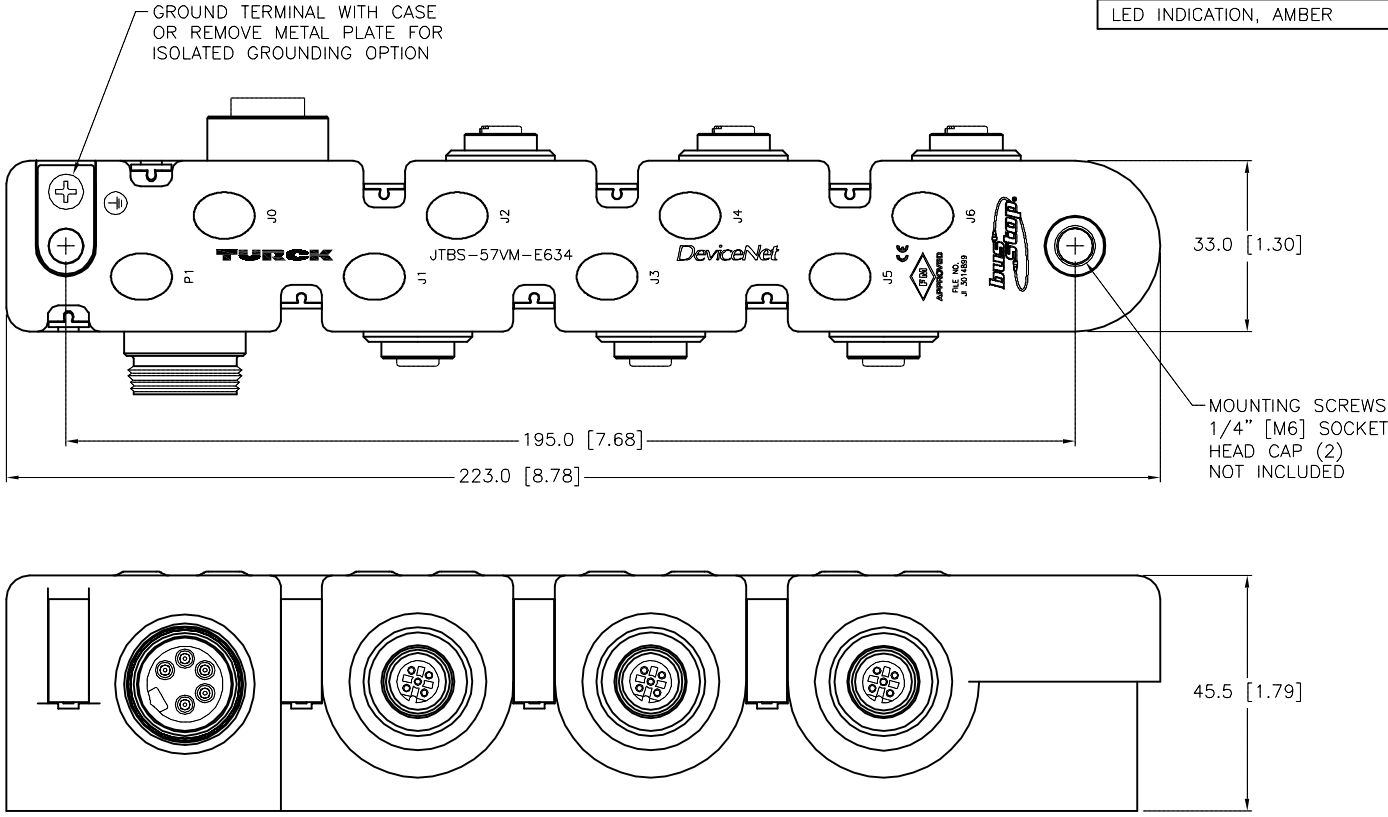

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1.			DRFT	RDS	DATE	DESCRIPTION	
2.			APVD	GC	06/04/02	JTBS-57VM-E634	
3.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT			IDENTIFICATION NO.	
4.			MILLIMETER [INCH]			U8683-64	
MATERIAL		CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING			REV	
FINISH						F	
F	UPDATE WIRING DIAGRAM	RDS	10/03/14	64093	FILE: U8683-64		
REV	DESCRIPTION	BY	DATE	ECO NO.	SHEET 1 OF 1		