


SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	TPU/YELLOW
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL	BRASS/NICKEL
RATED CURRENT [A]	10.0 A
RATED VOLTAGE [V]	600 V
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	4x16 AWG
DRAIN/SHIELD	18 AWG DRAIN/FOIL & TINNED COPPER BRAIDED
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

SOURCE DRAWING - FOR REFERENCE ONLY

FILE: 777015929

REV

SHEET 1 OF 1

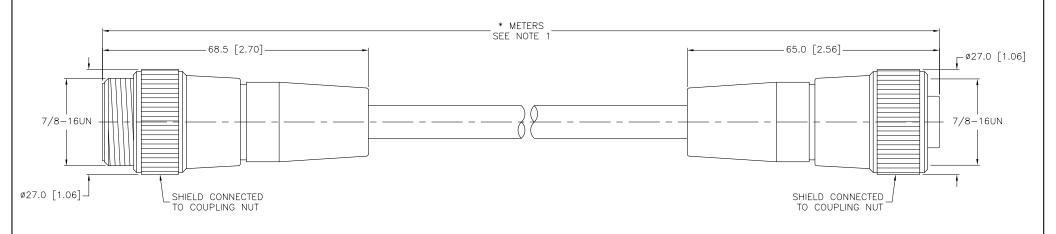

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

СВМ

04/06/1

DATE

33971

ECO NO.

NOTES:

DESCRIPTION

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

DRAWING PROCESSED AS PART OF ECO 33971

RELATED DOCUMENTS 3RD ANGLE PROJECTION THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 turck inc 2. (763) 553-7300 WITHOUT WRITTEN PERMISSION IS High Technology Sensors and Automation Controls 3. (763) 553-0708 fax PROHIBITED. turck.com DATE 01/19/07 MATERIAL RWC RSMS RKMS 46-*M ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR SCALE 1=1.0 DSGN SEE SPECIFICATIONS UNIT OF MEASUREMENT REFERENCE ONLY IDENTIFICATION NO. FINISH MILLIMETER [INCH] CONTACT TURCK FOR MORE SEE SPECIFICATIONS INFORMATION

DO NOT SCALE THIS DRAWING