

## Timer module - RIF-T3-24UC - 2902647

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Plug-in module for extending a relay module to create a timer relay, 3 time functions, 4 time ranges, for mounting on RIF-1, RIF-2, RIF-3, and RIF-4, input voltage: 24 V DC



### Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	20.0 GRM
Custom tariff number	85363010
Country of origin	Germany

### Technical data

#### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

#### Input data

Nominal input voltage $U_N$	24 V DC (AC operation only permitted for RIF-1)
Input voltage range in reference to $U_N$	0.4 ... 1.2
Mains frequency	50 Hz 60 Hz
Status display	Yellow LED
Protective circuit/component	Varistor
Surge voltage protection	> 56 V

#### Output data

Limiting continuous current	$\leq$ 250 mA (Relay coil current)
Voltage drop at max. limiting continuous current	< 100 mV

#### General

Setting accuracy	3 % (of scale end value)
------------------	--------------------------

# Timer module - RIF-T3-24UC - 2902647

## Technical data

### General

Repeat accuracy	1 %
Rated surge voltage	0.4 kV
Rated insulation voltage	50 V DC
Insulation	Basic insulation
Standards/regulations	DIN EN 50178
Surge voltage category	I
Pollution degree	2
Mounting position	any
Assembly instructions	Can be inserted into relay base

### Ambient conditions

Ambient temperature (operation)	-25 °C ... 50 °C (RIF-1, AC coil, 2 PDTs at 6 A)
	-25 °C ... 50 °C (RIF-1, DC coil, 2 PDTs at 5 A)
	-25 °C ... 40 °C (RIF-2, DC coil, 2 PDTs at 8 A)
	-25 °C ... 40 °C (RIF-2, DC coil, 4 PDTs at 5 A)
	-25 °C ... 40 °C (RIF-3, DC coil, 3 PDTs at 6.75 A)
	-25 °C ... 40 °C (RIF-3, DC coil, 2 PDTs at 8 A)
	-25 °C ... 35 °C (RIF-4, DC coil, 3 PDTs at 8 A)
	-25 °C ... 25 °C (RIF-4, DC coil, 3 N/O contacts at 8 A)
Ambient temperature (storage/transport)	-25 °C ... 85 °C

## Classifications

### eCl@ss

eCl@ss 4.0	27371102
eCl@ss 4.1	27371102
eCl@ss 5.0	27371603
eCl@ss 5.1	27371603
eCl@ss 6.0	27371603
eCl@ss 7.0	27371603

### ETIM

ETIM 3.0	EC001456
ETIM 4.0	EC001456
ETIM 5.0	EC002586

### UNSPSC

UNSPSC 6.01	30211917
-------------	----------

# Timer module - RIF-T3-24UC - 2902647

## Classifications

### UNSPSC

UNSPSC 7.0901	39121516
UNSPSC 11	39121516
UNSPSC 12.01	39121516
UNSPSC 13.2	39121516

## Approvals

### Approvals

---

Approvals

UL Recognized / CSA

---



Ex Approvals

---

Approvals submitted

---


### Approval details



## Drawings


# Timer module - RIF-T3-24UC - 2902647

Diagram

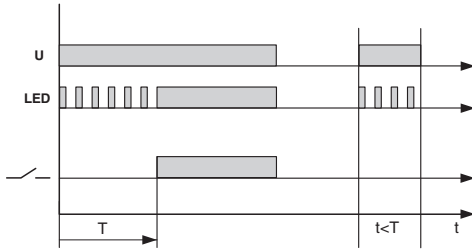


With switch-on delay

Diagram

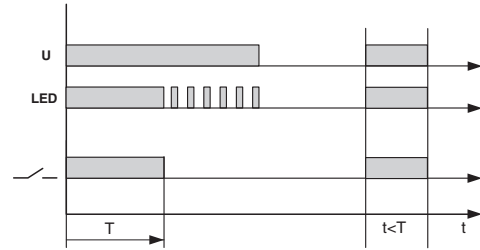

With passing make contact

Diagram

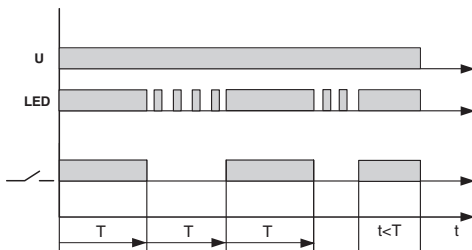

Flasher/pulse generator

Circuit diagram

