

Mating face SCRJ acc. to IEC 50 377-3-6

X


Protection cap

Han PushPull SCRJ plastic

$\varnothing 8$

X
(without protection cap)


26,2

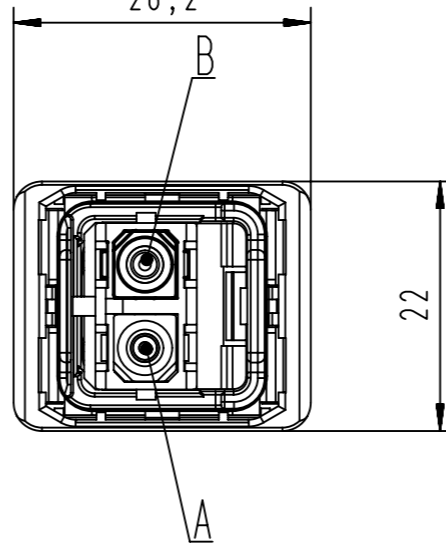

Loading-Plan

A	black	B
B	orange	A

Y
(without protection hood)

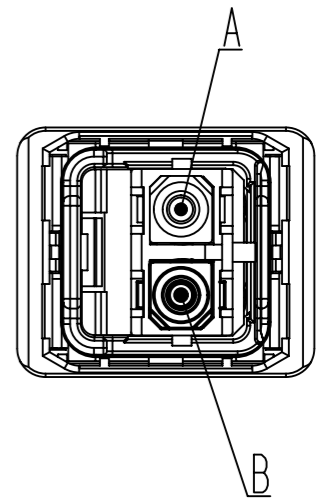

-Protection level: IP67/65
-Temperature range: -20°C ...+70°C

Cont. No.	Part No.	Type of cable	Dim. a[m]
5	3353211020001	Fiber optic cable, POF	20
4	3353211010001	Fiber optic cable, POF	10
3	3353211005001	Fiber optic cable, POF	5
2	3353211002001	Fiber optic cable, POF	2
1	3353211001001	Fiber optic cable, POF	1

	All rights reserved Department EC PD - RO	All Dimensions in mm Original Size DIN A3		Scale 1.5:1	Free size tol.	Ref. Sub.
		Created by OLESCHR	Inspected by AVRAM	Standardisation HOFFMANN	Date 2013-02-27	State Final Release
HARTING Electronics GmbH D-32339 Espelkamp		Title Fiber optic cable assembly			Doc-Key / ECM-Nr. 100225657/UGD/005/A 50000085940	
		Type TB	Number 3353211XXX0001		Rev. A	Page 1/1