


# SMA Straight Jack-U.FL Jack Adaptor

RS Stock No 7385941

NO	DESCRIPTION	DATE
⚠	BRASS PER JIS-C3604 BERYLLIUM COPPER PER ASTM B196 UNS C17300	09.20.11'
⚠	WORKING VOLTAGE → VOLTAGE RATING DEL PRODF VOLTAGE	10.03.13'

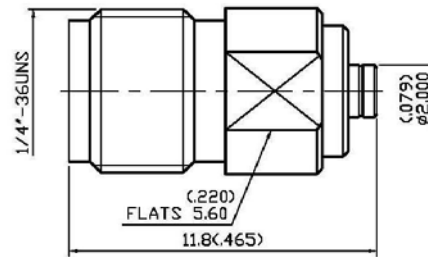

### 1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-8 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 VOLTAGE RATING: 100 VOLTS MAX. ⚠
- 1.4 VSWR: 1.3 MAX.

### 2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 UNS C17300 ⚠
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

### 3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

### 4.0 MECHANICAL

- 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348A

### 5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -40° C TO +90° C

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
3	CENTER CONTACT	BERYLLIUM COPPER	1	GOLD 50μ" MIN.
2	INSULATION	TEFLON	1	NONE
1	BODY	BRASS	1	GOLD 3μ" MIN.

APPROVED by \_\_\_\_\_ DATE: \_\_\_\_\_

DESCRIPTION		STRAIGHT SMA JACK-U.FL JACK ADAPTER	
製圖	DRAWN	TOLERANCE	品名
檢圖	Yoko	X ±0.2	19-82 T.G.G
認	CHECK	XX ±0.1	單
定	Arc	XXX ±0.05	位
	APPROVAL	ANGLE ±5°	mm(in)
	Jenny		DWG.NO. 19-0287
			SCALE
			比例 6:1
			DATE 07.15.11'
			版次 A-2
			REV.

