
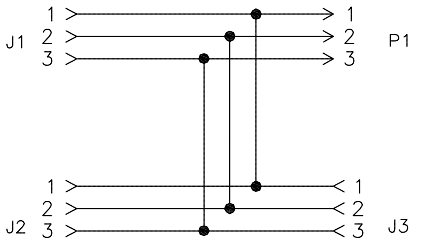



MALE END VIEW (P1)

FEMALE END VIEW (J1-J3)

WIRING DIAGRAM


SPECIFICATIONS



MOLDED BODY MATERIAL/COLOR	TPU/BLACK
CONTACT CARRIER MATERIAL	TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	15.0 A
RATED VOLTAGE [V]	600 VAC/VDC
TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)
PROTECTION CLASS	MEETS IEC IP67

M16 connector

M16 connector

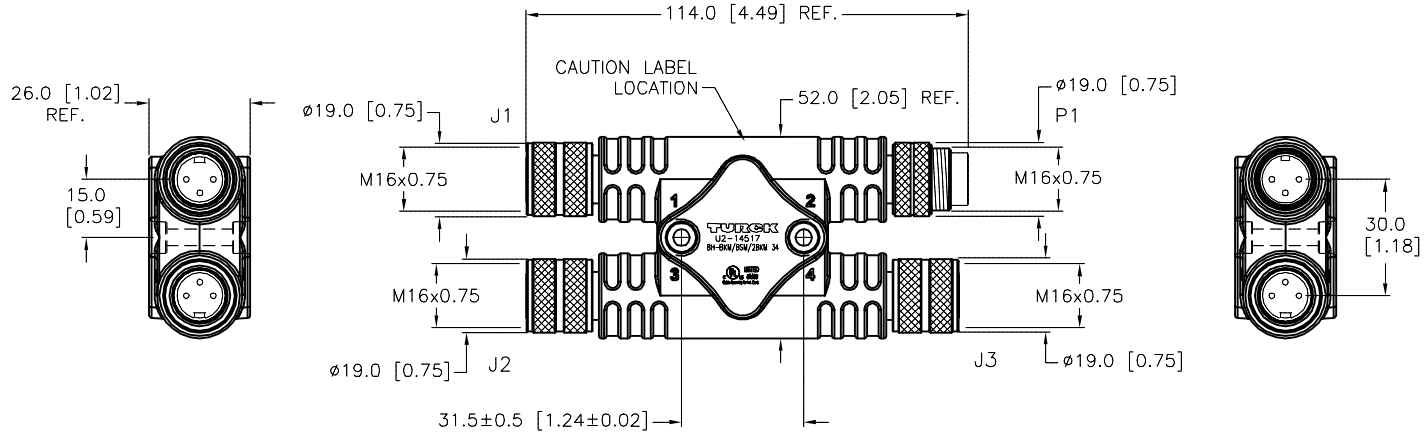

SOURCE DRAWING - FOR REFERENCE ONLY

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				
1.						
2.						
3.						
4.						
MATERIAL	SEE SPECIFICATIONS	DRFT	RDS	DATE	09/03/08	DESCRIPTION BH-BKM/BSM/2BKM 34
FINISH	SEE SPECIFICATIONS	APVD		SCALE	1=2.0	
		UNIT OF MEASUREMENT MILLIMETERS			IDENTIFICATION NO.	REV
		CONTACT TURCK FOR MORE INFORMATION				E
		DO NOT SCALE THIS DRAWING			FILE: U2-14517	SHEET 1 OF 1

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
TURCK INC High Technology Sensors and Automation Controls	
DRFT RDS DATE 09/03/08 APVD SCALE 1=2.0	
IDENTIFICATION NO. U2-14517 REV E	
FILE: U2-14517 SHEET 1 OF 1	

E	UPDATE CLICHE PER ECO	KMY	03/08/13	41196
REV	DESCRIPTION	BY	DATE	ECO NO.