MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

MINIATURE PRECISION LIMIT SWITCH

CATALOG LISTING
924CE16-T3

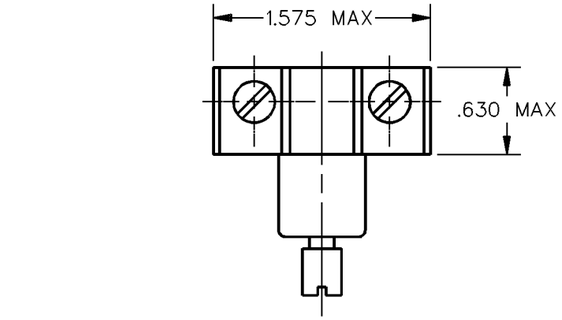

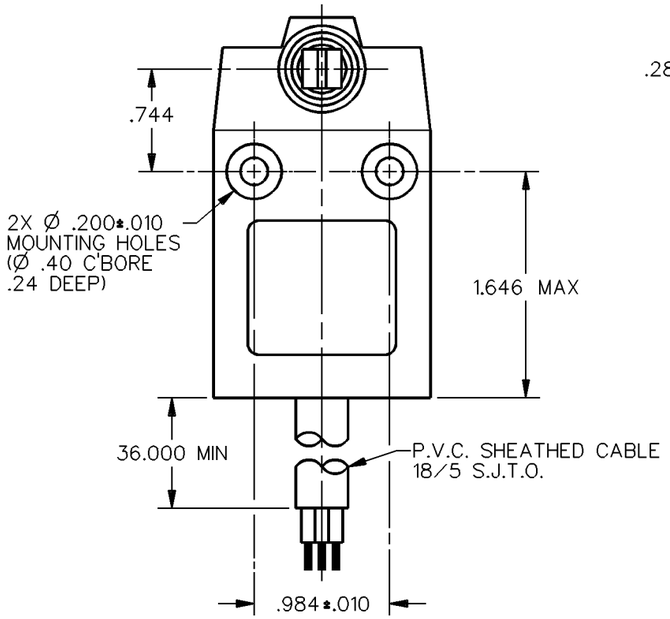

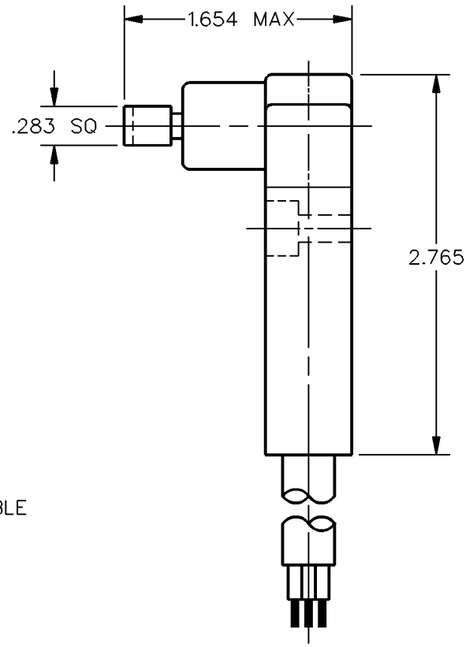



CIRCUIT DIAGRAM

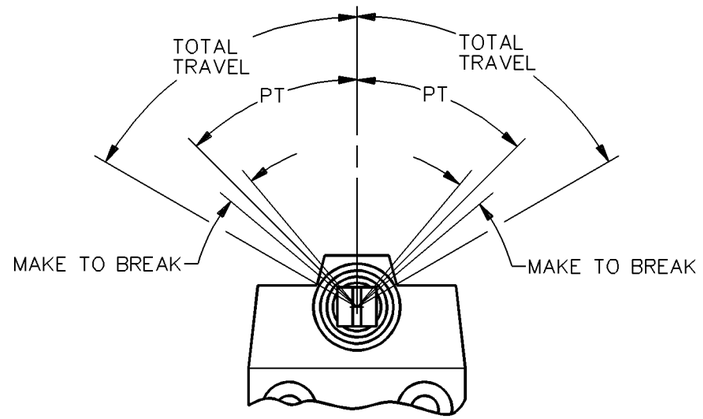

NOTES
1 – ZINC HOUSING FINISHED WITH GRAY PAINT
2 – SWITCH WILL ACTUATE IN BOTH DIRECTIONS
3 – MAKE BEFORE BREAK CIRCUITRY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

CHARACTERISTICS

OPERATING FORCE — — — 2.62 IN. LB MAX
PRETRAVEL — — — — — — — — 48° MAX
TOTAL TRAVEL — — — — — — 65° MIN
MAKE TO BREAK — — — — — — — 7°±6°

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T D B

10A 250 VAC
1/3 HP 125 OR 250 VAC

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

ANSI Y14.5M–1982 APPLIES

924CE16-T3 | M | DRAWING NUMBER | ISSUE 2 | RELEASE NO. PR-14729 | REPLACES | CHECK | CHECK | CHECK | CHECK

REVISIONS
A CO-69061 S A V 4 NOV 91

DDM/CAD | DRAWN | SAV 4 NOV 91