


BCC A51A-A51A-70-355-VX4AW8-080
BCC08J6

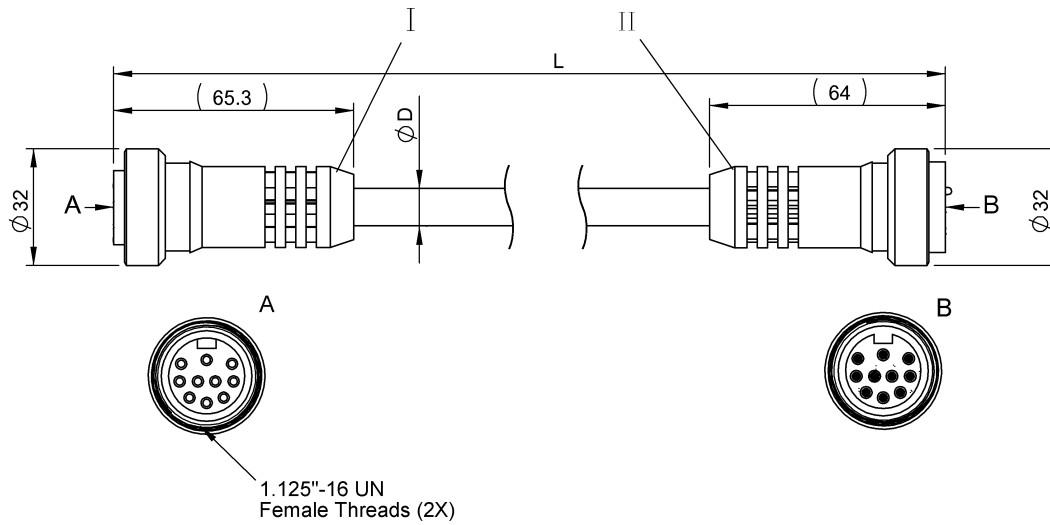

Electrical connection

Cable	PVC yellow, 8.00 m
Conductor cross-section	AWG 18
Number of conductors	10
Number of pins	10/10
System	Molded/Molded

Electrical data

Rated current (40 °C)	4.0 A
-----------------------	-------

Environmental conditions

Cable temperature, fixed routing	-40...105 °C
Protection type IEC 60529	IP67 /IP67

General data

Application	Operating voltage
Approval/Conformity	cULus LISTED



Material

Material contact carrier	PUR/PUR
Material contacts	Brass/Brass
Material cover nut	Aluminum anodized/Aluminum anodized
Material grip	PVC

Remarks

Bulk cable: Oil resistant PVC jacket rated to 300 V, 105 °C, no wicking, non-hygroscopic, UL Style 2661 or 2517

Connector view



BCC A51A-A51A-70-355-VX4AW8-080
BCC08J6

Wiring Diagram

