


SPECIFICATIONS					
CONTACT CARRIER MATERIAL	NYLON OR TPU				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
HOUSING, LOCKNUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED				
O-RING MATERIAL	BUNA-N (NITRILE)				
RATED CURRENT [A]	4.0 A				
RATED VOLTAGE [V]	250 V				
OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY				
CONDUCTOR INSULATION MATERIAL	PVC				
NUMBER OF CONDUCTORS [AWG]	4x22 AWG				
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)				
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68				

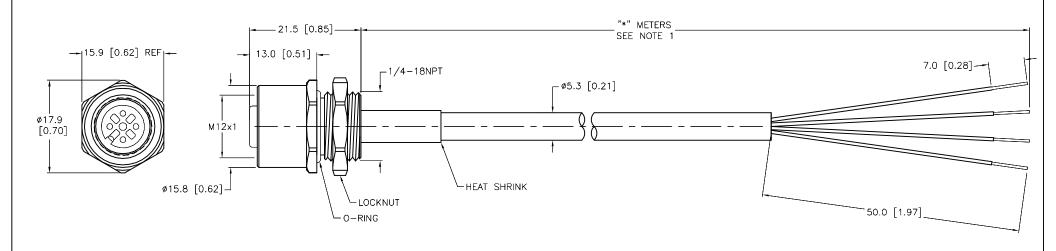

CABLE LENGTH	TOLERANCE *			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE *			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNLESS OTHERWISE SPECIFIED				

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. "/S717" DESIGNATES GREY PVC CABLE WITH ONLY CONDUCTORS POTTED INTO RECEPTACLE HOUSING NOT CABLE JACKET.

	RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TUBECK NAC High Technology Sensors and Automation Cantrols		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
	MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	DRFT RDS APVD	DATE 11/08/06 SCALE 1=.8	DESCRIPTION FKV 4.4-*/18	3.25/S717	
	FINISH	DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORF	UNIT OF ME		IDENTIFICATION NO.		REV F
143 NO.	SEE SPECIFICATIONS	INFORMATION	DO NOT SCALE	THIS DRAWING	FILE: 777010796	SHEET	1 OF 1

L					
	Ŧ	UPDATE CABLE DIAMETER	KMY	04/09/12	37143
Г	REV	DESCRIPTION	BY	DATE	ECO NO.