



WIRING DIAGRAM

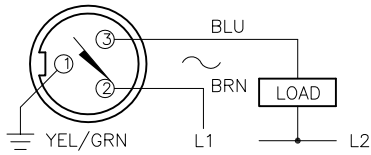

SHORT-CIRCUIT AND OVERLOAD PROTECTED

NOTE: HIGH LEAKAGE

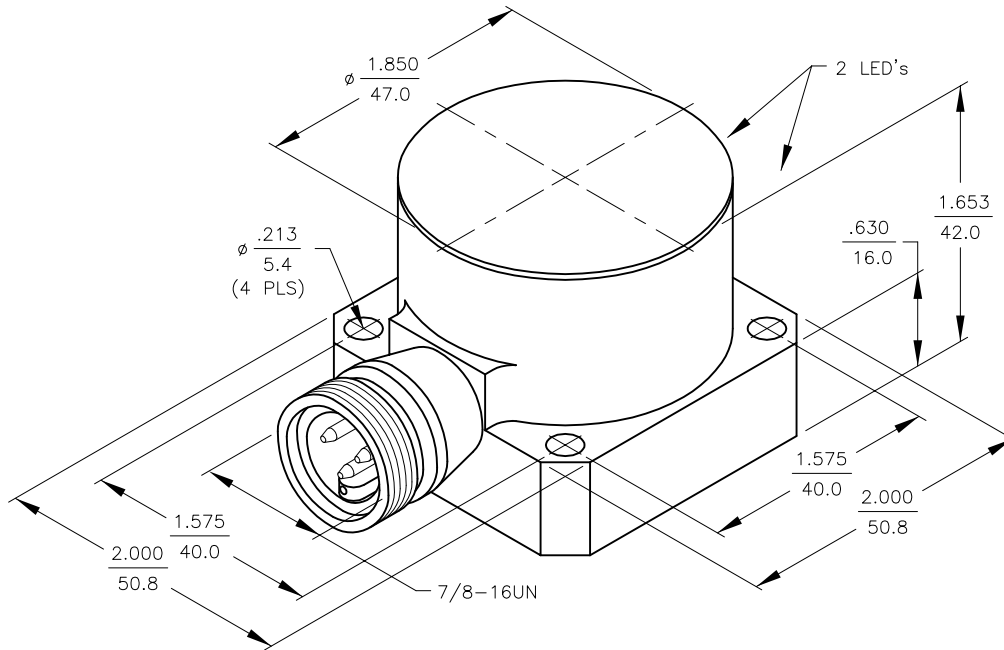

SPECIFICATIONS

OPERATING VOLTAGE	20-140 VAC/DC
LINE FREQUENCY	40-60 Hz
DIFFERENTIAL TRAVEL (HYSTERESIS)	3-15% (5% TYPICAL)
VOLTAGE DROP ACROSS CONDUCTING SENSOR	≤4.5 V at 400 mA
OUTPUT FUNCTION	NORMALLY OPEN 2-WIRE AC/DC SELF-CONTAINED
SHORT-CIRCUIT PROTECTED	YES
TRIGGER CURRENT FOR OVERLOAD PROTECTION	500-800 mA
CONTINUOUS LOAD CURRENT	≤400 mA
LEAKAGE (OFF-STATE) CURRENT	4.0-5.0 mA
MINIMUM LOAD CURRENT	≥10 mA
INRUSH CURRENT	3.0 A (≤20 ms/5 Hz)
TIME DELAY BEFORE AVAILABILITY	≤30 ms
POWER-ON EFFECT PROTECTION	INCORPORATED
PROTECTION AGAINST TRANSIENTS	5 kV, 10 ms, 10 kΩ
OPERATING TEMPERATURE	-25°C to +70°C (-13°F to +158°F)
ENCLOSURE	MEETS NEMA 1, 3, 4, 6, 13 AND IEC IP67
SHOCK	30 g, 11 ms
VIBRATION	10 Hz to 55 Hz, 1 mm AMPLITUDE (IN ALL 3 PLANES)
LED FUNCTION	RED: POWER ON RED FLASHING: SHORT-CIRCUIT WARNING GREEN: OUTPUT ENERGIZED
SENSING RANGE	20 mm = .787" (NOMINAL)
SWITCHING FREQUENCY	30 Hz
REPEATABILITY	≤2% of RATED OPERATING DISTANCE
EMBEDDABLE (SHIELDED)	NO

NOTES:

1. "/S34" DESIGNATES WELD FIELD IMMUNITY. SENSOR IS SUITABLE FOR USE ON RESISTANCE WELDING MACHINES.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 High Technology Sensors and Automation Controls		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.				DRFT RJP		DATE 4/3/92		DESCRIPTION Ni20-Q50-ADZ40X2-B1131/S34	
MATERIAL ALUMINUM		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DSGN		SCALE NONE		IDENTIFICATION NO. T4265400	
FINISH PTFE COATED		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT INCH [MILLIMETER]		DO NOT SCALE THIS DRAWING		REV C	
C REMOVE TRADEMARKED MATERIAL REFERENCES		CBM 11/16/12 40471		FILE: T4265400		SHEET 1 OF 1			
REV DESCRIPTION		BY DATE ECO NO.							