


BCC M224-M313-30-300-PX0314-030  
BCC0HEY

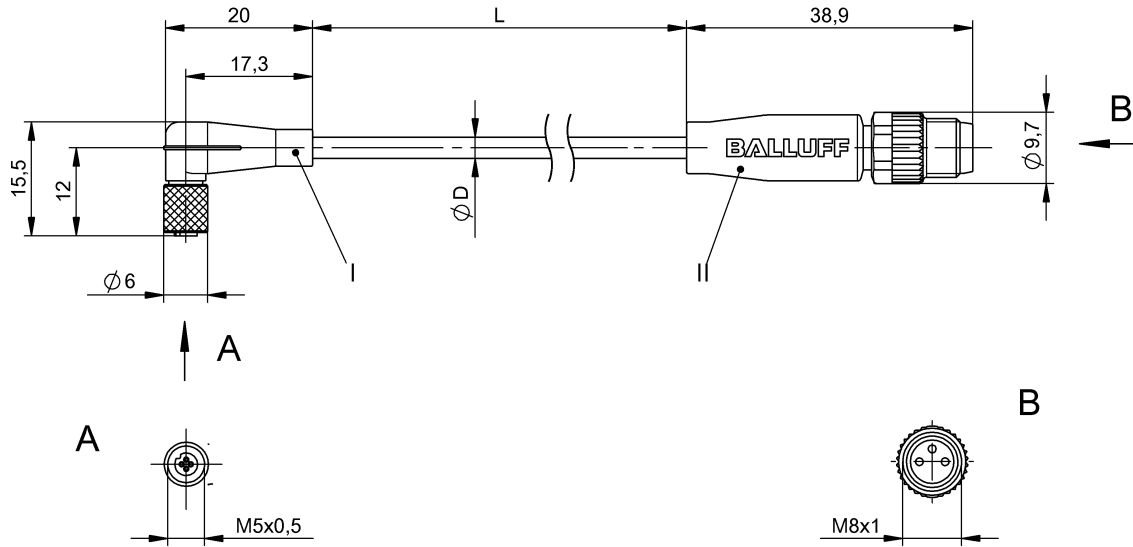

## Electrical connection

Cable	PUR black, 3.00 m
Cable diameter D	3.10 mm ±0.10 mm
Conductor cross-section	0.14 mm <sup>2</sup>
Number of conductors	3
Number of pins	4/3
System	Molded/Molded

## Electrical data

Rated current (40 °C)	1.0 A
-----------------------	-------

## Environmental conditions

Cable temperature, fixed routing	-25...80 °C
Cable temperature, flexible routing	-5...80 °C

Protection type IEC 60529

IP67 /IP67

## Material

Material contact carrier	PUR/PUR
Material contacts	Bronze/Brass
Material cover nut	Brass/Die-cast zinc
Material grip	PUR/PUR

## Mechanical data

Tightening torque pigtail	-/0.4 Nm
---------------------------	----------


## Remarks

Enclosure rating per IEC 60529, only in screwed state with the associated mating piece.

## Connector view



I PIN 1: brown PIN 3: blue PIN 4: black



II PIN 1: brown PIN 3: blue PIN 4: black

BCC M224-M313-30-300-PX0314-030  
BCC0HEY

## Wiring Diagram

