


## BES R03KC-NOC30B-EP05 BES01WK



1) Sensing surface

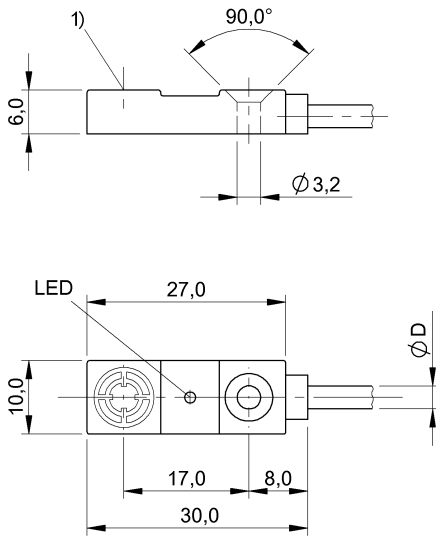

IND. CONT. EQ  
81U2  
for use in the secondary of  
a class 2 source of supply  
Environmental - Type 1 Enclosure



### Display/Operation

Function indicator	yes
Power indicator	no

### Electrical connection

Cable diameter D	3.00 mm
Cable length	5 m
Conductor cross-section	0.14 mm <sup>2</sup>
Connection type	Cable, 5.00 m, TPU
Number of conductors	3
Polarity reversal protected	yes
Short-circuit protection	yes

### Electrical data

Hysteresis H max. (% of Sr)	15.0 %
Load capacitance max. at Ue	0.2 µF
MTTF (40 °C)	585 a
No-load current I <sub>0</sub> max., undamped	14 mA
Operating voltage U <sub>b</sub>	10...30 VDC
Output resistance R <sub>a</sub>	Open collector
Pollution degree	3
Protected against miswiring	yes
Rated insulation voltage U <sub>i</sub>	75 V DC
Rated operating current I <sub>e</sub> DC	100 mA
Rated operating voltage U <sub>e</sub> DC	24 V
Rated short circuit current	100 A
Ready delay t <sub>v</sub> max.	15 ms
Repeat accuracy max. (% of Sr)	5.0 %
Residual current I <sub>r</sub> max.	1 µA
Switching frequency	3000 Hz
Utilization category	DC -12

Voltage drop static max. 1.8 V

### Environmental conditions

Ambient temperature	-25...70 °C
Protection type IEC 60529	IP67

### Functional safety

Diagnostic coverage	0 %
Functional safety	no
Mission Time	20 a

### General data

Approval/Conformity	CE cULus EAC
Basic standard	IEC 60947-5-2

### Material

Housing material	PA, PA 6GF30
Material jacket	TPU
Material sensing surface	PA 6, GF30black

### Mechanical data

Dimension	30 x 10 x 6 mm
Installation	for flush mounting

### Output/Interface

Switching output	NPN Normally closed (NC)
------------------	--------------------------

## BES R03KC-NOC30B-EP05 BES01WK

### Range/Distance

Assured operating distance Sa	2.4 mm
Range	3 mm
Rated operating distance Sn	3 mm
Ripple max. (% of Ue)	15 %
Temperature drift max. (% of Sr)	10 %

### Remarks

The sensor is functional again after the overload has been eliminated.

For further information on MTTF/B10d, please refer to the MTTF / B10d Certificate.

Specification of the MTTF value and the B10d value do not represent any binding quality and/or life expectancy guarantees.

### Wiring Diagram

