
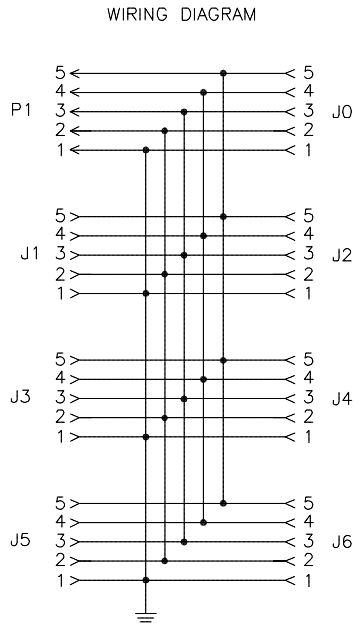
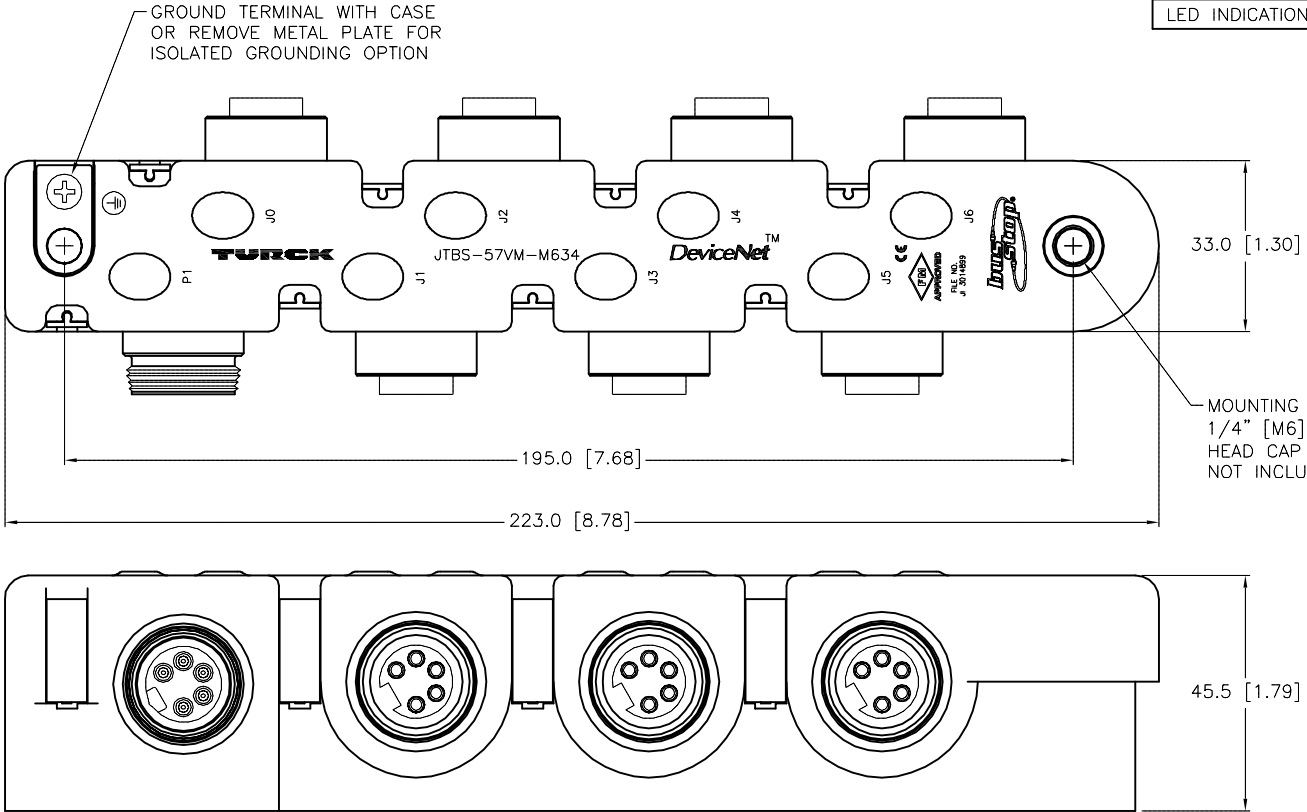


SPECIFICATIONS	
HOUSING MATERIAL/COLOR	TPU/BLACK
RECEPTACLE HOUSING/PLATING	BRASS/NICKEL
CONTACT CARRIERS	TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	35 VDC
OPERATING CURRENT	4.0 A PER CONNECTOR
PROTECTION CLASS	NEMA 1,3,4,6,13 AND IEC IP67
OPERATING TEMPERATURE	-30°C to 80°C (-22°F to 176°F)
LED INDICATION, FLASHING AMBER	< 12.9 V
LED INDICATION, GREEN	21.9-25.6 V
LED INDICATION, AMBER	> 25.6 V



SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		<b>TURCK INC</b> High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.				DRFT GC DATE 06/03/02 APVD GC SCALE 1=1.5		DESCRIPTION JTBS-57VM-M634	
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT <b>MILLIMETER [ INCH ]</b>		IDENTIFICATION NO. U8684-64	
FINISH		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		REV D	
D	UPDATE WIRING DIAGRAM	RDS	10/03/14	47381			
REV	DESCRIPTION	BY	DATE	ECO NO.	FILE: U8684-64		SHEET 1 OF 1