


BCC M314-0000-10-003-EX44T2-200  
BCC0H04

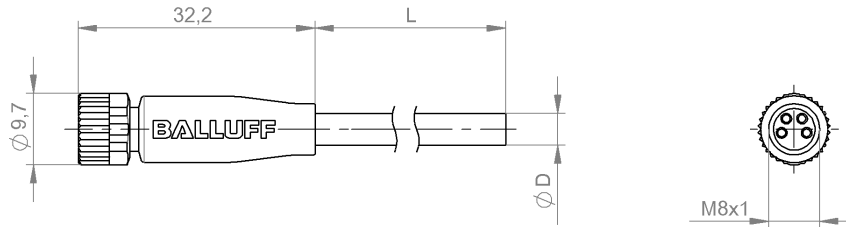

4MT5  
(CJ/V CABLE ASSEMBLY)

## Electrical connection

Bending radius min., fixed cable	5 x D
Bending radius min., flexible cable	10 x D
Cable	TPE yellow, 20.00 m, Drag chain compatible
Cable diameter D	5.30 mm ±0.13 mm
Cable, bending cycles min.	10 million
Conductor cross-section	AWG 22
Number of conductors	4
Number of pins	4
System	Molded

## Electrical data

Cable rated voltage AC max.	300.0 V
Cable rated voltage DC max.	300.0 V
Rated current (40 °C)	4.0 A

## Environmental conditions

Cable temperature, fixed routing	-50...105 °C
Cable temperature, flexible routing	-25...105 °C

Protection type IEC 60529

IP67

## General data

Approval/Conformity cULus LISTED

## Material

Material contact carrier	PUR
Material contacts	Bronze
Material cover nut	Die-cast zinc
Material grip	TPE

## Mechanical data


Tightening torque pigtail 0.4 Nm

## Remarks

Enclosure rating per IEC 60529, only in screwed state with the associated mating piece.  
Cable construction acc. to UL-AWM Style 20327  
Flame resistance acc. to IEC 332-2

BCC M314-0000-10-003-EX44T2-200  
BCC0H04

## Connector view



PIN 1: brown PIN 2: white PIN 3: blue PIN 4: black

## Wiring Diagram

