

## 100W to 150W AC-DC External Power Supplies

### Features

- ◆ DOE level VI and EU tier 2 Efficiency Levels
- ◆ 89% Average Efficiency
- ◆ <150mW Off-load Power Draw
- ◆ Wide Range AC Input
- ◆ Power Factor Correction




### Key Market Segments & Applications



Specifications			
Model		DT100PWxxx-D	DT150PWxxx-D
Input Voltage range	-		90 - 264VAC (47 - 63Hz)
Inrush Current	A		< 150A at 230VAC input, 25°C ambient cold start
Input Current (Maximum)	A		2.5A
Power Factor	-		Typically 0.9 at full load, 230VAC (Meets EN61000-3-2)
Leakage Current	uA		<300uA at 264VAC input
Hold Up Time (Typ)	ms		16ms at 115VAC input
Temperature Coefficient	%/°C		±0.05%/°C
Voltage Accuracy	%		±1%
Adjustment Range	V		None
Minimum Load	A		None
Total Regulation	%		See model selector
Ripple & Noise	%		See model selector
Short Circuit Protection	-		Continuous - hiccup mode
Overvoltage Protection	V		110 - 130% of nominal (Cycle input power to reset)
Efficiency	%		>87% Avg Active Efficiency
Operating Temperature	°C		-20 to +60°C, de-rate linearly to 50% load from 40 to 60°C
Storage Temperature	°C		-20 to +70°C
Humidity (non condensing)	%RH		10 - 90%RH
Cooling	-		Convection
Withstand Voltage	VAC		Input to Ground 1.5kVAC, Input to Output 3kVAC, Output to Ground 500VDC*
Vibration (non operating)	-		23.52m/s <sup>2</sup> (10 - 55Hz: constant sweep 1 min X, Y, Z for 1 hour)
Shock	-		< 196.1 m/s <sup>2</sup> (20G)
Safety Agency Approvals	-		UL/CSA60950-1, EN69501-1, IEC60950-1
Efficiency Level	-		VI
Offload Power Consumption	W		< 0.15W
Conducted & Radiated EMI	-		EN55022-B, FCC Class B
Immunity	-		EN55024
Weight (Typ)	g		780g
Size (WxLxH)	mm (in)		85 x 170 x 44 (3.35 x 6.7 x 1.73")
Cable Length and Thickness	mm		1050mm; 12 to 24V Models: #14 AWG, 36 to 48V Models: #16 AWG
AC Input Connector	-		IEC 320-C14 (Accepts IEC 320-C13)
Output Connector	-		Kycon KPP-4P or equivalent Pins 1 & 2: -Vout, Pins 3 & 4: +Vout
MTBF	hrs		140,000 hours, 100% load, 25°C ambient, MIL-HNBK
Warranty	yrs		Three years

\* Versions available for output to be internally connected to ground. Contact factory.

<b>Output Ratings</b>					
Model	Output (V)	Maximum Output (A)	Maximum Power (W)	Output Regulation	Ripple & Noise (mV)
DT100PW120D	12	8.34	100	±5%	240
DT100PW160D	16	6.25	100	±5%	320
DT100PW190D	19	5.27	100	±5%	380
DT100PW240D	24	4.17	100	±3%	480
DT100PW360D	36	2.78	100	±3%	480
DT100PW480D	48	2.09	100	±3%	480
DT150PW120D	12	11.67	140	±5%	240
DT150PW160D	16	9.38	150	±5%	320
DT150PW190D	19	7.90	150	±5%	380
DT150PW240D	24	6.25	150	±3%	480
DT150PW360D	36	4.17	150	±3%	480
DT150PW480D	48	3.13	150	±3%	480

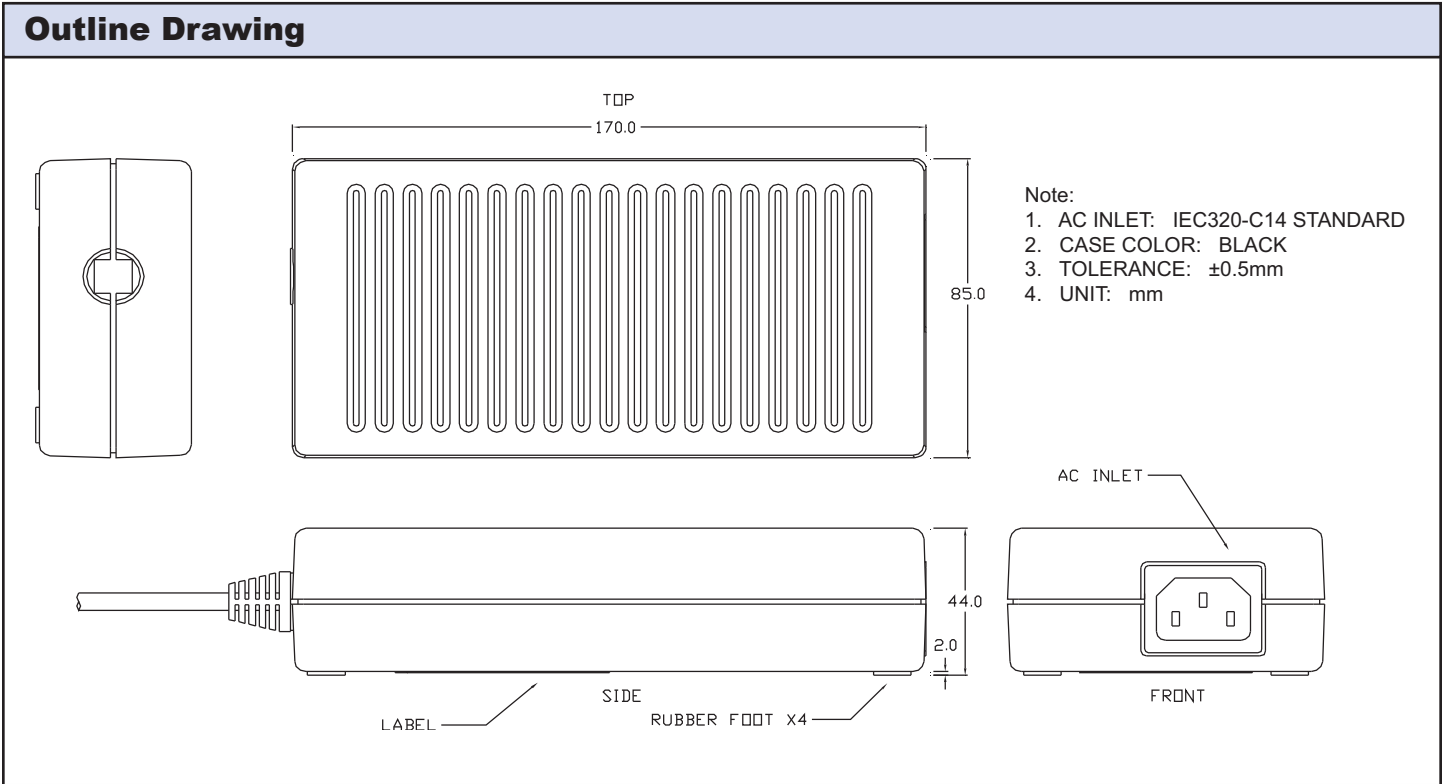

<b>Other TDK-Lambda Adapters</b>	
DT62-D	65W Level VI Compliant Adapters
DTM65-C	65W Level V Compliant Medical Adapters
DT80-D	80W Level VI Compliant Adapters
DTM110-C	110W Level V Compliant Medical Adapters
DTM165-C	165W Level V Compliant Medical Adapters

For Additional Information, please visit [us.tdk-lambda.com/lp/products/dt-c-series.htm](http://us.tdk-lambda.com/lp/products/dt-c-series.htm)

