F31T8/835/U

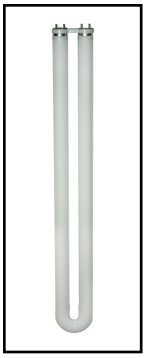

Description 31W 3500K T8 85 CRI Medium Bi-pin U-Bent 1 5/8 inch Spacer

Specifications	
Bulb Type	T-8
Base Type	G13
Special Desc	U-Bend 1-5/8 inch centers, Universal Start
MOL in/mm	22.5/571
MOD in/mm	1.0/26
Watts	31
CT deg K	3500
Avg Life	20,000
Photo No	628
CRI	85
Approx Initial Lumens	2750
Approx Mean Lumens	2475
Approvals	TCLP Compliant

watch > like > follow

selection. solutions. simplicity. eiko.com
23220 W. 84th St, Shawnee, KS 66227 · (P) 1.800.852.2217 (F) 1.800.492.8975
Canada: 81 King St, Barrie, ON L4N 6B5 · (P) 1.888.410.8151 (F) 1.888.705.1335