

OUTPUT INTERFACE 1C/O, CAGE CLAMP 24 V AC/DC HOUSING
WIDTH 6.2 MM START OF DELIVERY OCT. 97

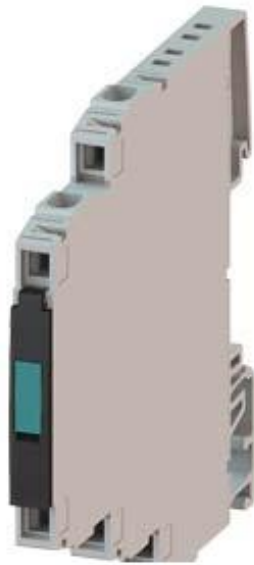


Figure similar

General technical data:

| | |
|--|--------------|
| Type of voltage | AC/DC |
| Supply voltage frequency for auxiliary and control current circuit Rated value | 50 ... 60 Hz |
| Control supply voltage | |
| • at AC | |
| — at 50 Hz Rated value | |
| — minimum | 24 V |
| — maximum | 24 V |
| — at 60 Hz Rated value | |
| — minimum | 24 V |
| — maximum | 24 V |
| • at DC Rated value | |
| — minimum | 24 V |
| — maximum | 24 V |
| Number of NC contacts for auxiliary contacts | 0 |
| Number of NO contacts for auxiliary contacts | 0 |
| Number of CO contacts for auxiliary contacts | 1 |
| Operating current of the auxiliary contacts | |

- at DC-13
 - at 24 V
 - at 110 V
 - at 230 V
- at AC-15
 - at 230 V

1 A
0.2 A
0.1 A

3 A

| | |
|---|------------|
| Switching behavior | monostable |
| Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750 | K |
| Equipment marking acc. to DIN EN 61346-2 | K |





Mechanical data:

| | |
|--|-------------------------|
| Type of electrical connection | spring-loaded terminals |
| Type of electrical connection Plug-in socket | No |
| Design of the relay operating mechanism | poled |
| Design of the switching function positively driven | No |
| Product component Plug-in socket | No |
| Width | 6.2 mm |
| Height | 80 mm |
| Depth | 86 mm |

Ambient conditions:

| | |
|--------------------------------------|----------------|
| Protection class IP | IP20 |
| Ambient temperature during operation | -25 ... +60 °C |

Certificates/ approvals:

| General Product Approval | Declaration of Conformity | Test Certificates | other |
|--|---|---|---|
|  CCC |  |  UL |  EG-Konf. |
| | | spezielle Prüfbescheinigung <u>n</u> | sonstig |

other

[Bestätigungen](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TX70051LB00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TX70051LB00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TX70051LB00&lang=en

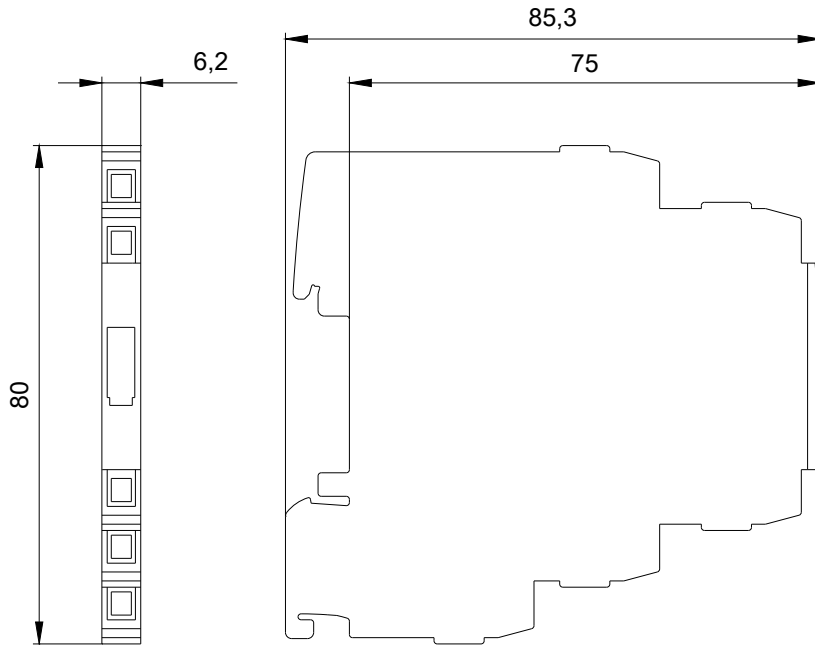

last modified:

17.07.2015