

### 97 Series Solder Style Panel & Cable Mount D-Sub Connectors

Gold-Plated Contacts, Copper Alloy/Gold-Plated Housing on Nickel Thermoplastic Insulator



| Part No. | Pins | Gender | Housing     |
|----------|------|--------|-------------|
| 40-9709M | 9    | M      | Copper/Gold |
| 40-9715M | 15   | M      | Copper/Gold |
| 40-9725M | 25   | M      | Copper/Gold |
| 40-9737M | 37   | M      | Copper/Gold |
| 40-9750M | 50   | M      | Copper/Gold |



| Part No. | Pins | Gender | Housing     |
|----------|------|--------|-------------|
| 40-9709S | 9    | F      | Copper/Gold |
| 40-9715S | 15   | F      | Copper/Gold |
| 40-9725S | 25   | F      | Copper/Gold |
| 40-9737S | 37   | F      | Copper/Gold |
| 40-9750S | 50   | F      | Copper/Gold |

### 95 Series Solder Style Panel & Cable Mount D-Sub Connectors

Gold-Plated Contacts, Tin Alloy Housing on Nickel Thermoplastic Insulator



| Part No. | Pins | Gender | Housing |
|----------|------|--------|---------|
| 40-9509M | 9    | M      | Tin     |
| 40-9515M | 15   | M      | Tin     |
| 40-9525M | 25   | M      | Tin     |



| Part No. | Pins | Gender | Housing |
|----------|------|--------|---------|
| 40-9509S | 9    | F      | Tin     |
| 40-9515S | 15   | F      | Tin     |
| 40-9525S | 25   | F      | Tin     |

### 95 Series Solder Style Panel & Cable Mount High Density D-Sub Connectors

Gold-Plated Contacts, Tin Alloy Housing on Nickel Thermoplastic Insulator



| Part No.   | Pins | Gender | Housing |
|------------|------|--------|---------|
| 40-9515HDM | 15   | M      | Tin     |
| 40-9526HDM | 26   | M      | Tin     |




| Part No.   | Pins | Gender | Housing |
|------------|------|--------|---------|
| 40-9515HDS | 15   | F      | Tin     |
| 40-9526HDS | 26   | F      | Tin     |

### IDC Headers & D-Sub Connectors



**Dual Row Socket Connectors - Headers**  
(0.01" x 1" Spacing w/Strain Relief)

| Part No. | Pins |
|----------|------|
| 40-8110  | 10   |
| 40-8114  | 14   |
| 40-8116  | 16   |
| 40-8120  | 20   |
| 40-8126  | 26   |
| 40-8134  | 34   |
| 40-8140  | 40   |
| 40-8150  | 50   |

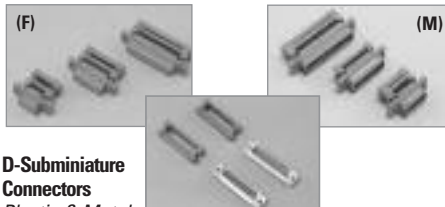

**D-Subminiature Connectors**  
Plastic & Metal

| Part No. | Pins | Gender | Housing |
|----------|------|--------|---------|
| 40-8309S | 9    | F      | Plastic |
| 40-8309M | 9    | M      | Plastic |
| 40-8315M | 15   | M      | Plastic |
| 40-8325S | 25   | F      | Plastic |
| 40-8325M | 25   | M      | Plastic |
| 40-8425M | 25   | M      | Metal   |

*These IDC connectors are constructed of phosphorus bronze contacts, flame retardant thermoplastic, and their insulation meets or exceeds UL-94 V-0.*

*These connectors are fully interchangeable with competitive Sockets and Headers, and are designed to work with 28 AWG Stranded or 30 AWG Solid Wire.*

(M) = Male Plug (F) = Female Socket