



Main

Range of product	Modicon M340 automation platform
Product or component type	Analog input module
Electrical connection	1 connector 40 ways
Input output isolation	Isolated
Input level	Low level
Analogue input number	4
Analogue input type	Thermocouple -50...+1769 °C thermocouple S Thermocouple -50...+1769 °C thermocouple R Thermocouple -270...+400 °C thermocouple T Thermocouple -270...+1370 °C thermocouple K Thermocouple -270...+1000 °C thermocouple E Thermocouple -200...+900 °C thermocouple L Thermocouple -200...+760 °C thermocouple J Thermocouple -200...+600 °C thermocouple U Thermocouple +270...+1300 °C thermocouple N Thermocouple +130...+1820 °C thermocouple B Temperature probe -60...+180 °C Ni 1000 Temperature probe -60...+180 °C Ni 100 Temperature probe -200...+850 °C Pt 1000 IEC Temperature probe -200...+850 °C Pt 100 IEC Temperature probe -100...+450 °C Pt 1000 UL/JIS Temperature probe -100...+450 °C Pt 100 UL/JIS Temperature probe -100...+260 °C Cu 10 Resistor 4000 Ohm 4 wires Resistor 4000 Ohm 3 wires Resistor 4000 Ohm 2 wires Resistor 400 Ohm 4 wires Resistor 400 Ohm 3 wires Resistor 400 Ohm 2 wires Voltage +/- 80 mV Voltage +/- 640 mV Voltage +/- 40 mV Voltage +/- 320 mV Voltage +/- 160 mV Voltage +/- 1.28 V

Complementary

Analog/Digital conversion	Sigma delta 16 bits
Analogue input resolution	15 bits + sign
Input impedance	10 MOhm
Permitted overload on inputs	+/- 7.5 V +/- 80 mV +/- 7.5 V +/- 640 mV +/- 7.5 V +/- 40 mV +/- 7.5 V +/- 320 mV +/- 7.5 V +/- 160 mV +/- 7.5 V +/- 1.28 V
Common mode rejection	120 dB 50/60 Hz
Differential mode rejection	60 dB 50/60 Hz
Cold junction compensation	External by Pt100 probe
Type of filter	First order digital filtering
Nominal read cycle time	200 ms with thermocouple 400 ms with temperature probe

Measurement error	0.12 % of full scale 4000 Ohm 25 °C 0.12 % of full scale 400 Ohm 25 °C 0.05 % of full scale +/- 80 mV 25 °C 0.05 % of full scale +/- 640 mV 25 °C 0.05 % of full scale +/- 40 mV 25 °C 0.05 % of full scale +/- 320 mV 25 °C 0.05 % of full scale +/- 160 mV 25 °C 0.05 % of full scale +/- 1.28 V 25 °C <= 0.2 % of full scale 4000 Ohm 0...60 °C <= 0.2 % of full scale 400 Ohm 0...60 °C <= 0.15 % of full scale +/- 80 mV 0...60 °C <= 0.15 % of full scale +/- 640 mV 0...60 °C <= 0.15 % of full scale +/- 40 mV 0...60 °C <= 0.15 % of full scale +/- 320 mV 0...60 °C <= 0.15 % of full scale +/- 160 mV 0...60 °C <= 0.15 % of full scale +/- 1.28 V 0...60 °C +/- 5 °C thermocouple T 0...60 °C +/- 5 °C thermocouple N 0...60 °C +/- 5 °C thermocouple K 0...60 °C +/- 5 °C thermocouple E 0...60 °C +/- 5 °C thermocouple B 0...60 °C +/- 4.5 °C thermocouple U 0...60 °C +/- 4.5 °C thermocouple S 0...60 °C +/- 4.5 °C thermocouple R 0...60 °C +/- 4.5 °C thermocouple L 0...60 °C +/- 4.5 °C thermocouple J 0...60 °C +/- 4 °C Cu 10 25 °C +/- 4 °C Cu 10 0...60 °C +/- 3.7 °C thermocouple T 25 °C +/- 3.7 °C thermocouple N 25 °C +/- 3.7 °C thermocouple K 25 °C +/- 3.7 °C thermocouple E 25 °C +/- 3.5 °C thermocouple B 25 °C +/- 3.2 °C thermocouple S 25 °C +/- 3.2 °C thermocouple R 25 °C +/- 3 °C thermocouple L 25 °C +/- 3 °C Ni 100 0...60 °C +/- 2.8 °C thermocouple J 25 °C +/- 2.7 °C thermocouple U 25 °C +/- 2.1 °C Pt 1000 25 °C +/- 2.1 °C Pt 100 25 °C +/- 2.1 °C Ni 100 25 °C +/- 2 °C Pt 1000 0...60 °C +/- 2 °C Pt 100 0...60 °C +/- 1.3 °C Ni 1000 0...60 °C +/- 0.7 °C Ni 1000 25 °C
Temperature drift	30 ppm/°C Pt 1000 30 ppm/°C Pt 100 30 ppm/°C Ni 100 30 ppm/°C Cu 10 30 ppm/°C +/- 80 mV 30 ppm/°C +/- 640 mV 30 ppm/°C +/- 40 mV 30 ppm/°C +/- 320 mV 30 ppm/°C +/- 160 mV 30 ppm/°C +/- 1.28 V 25 ppm/°C thermocouple U 25 ppm/°C thermocouple T 25 ppm/°C thermocouple S 25 ppm/°C thermocouple R 25 ppm/°C thermocouple N 25 ppm/°C thermocouple L 25 ppm/°C thermocouple K 25 ppm/°C thermocouple J 25 ppm/°C thermocouple E 25 ppm/°C thermocouple B 25 ppm/°C Ni 1000 25 ppm/°C 4000 Ohm 25 ppm/°C 400 Ohm
Recalibration	Internal
Isolation voltage	750 V DC between channels and ground 750 V DC between channels 1400 V DC between channels and bus


Detection type	Open circuit thermocouple U Open circuit thermocouple T Open circuit thermocouple S Open circuit thermocouple R Open circuit thermocouple N Open circuit thermocouple L Open circuit thermocouple K Open circuit thermocouple J Open circuit thermocouple E Open circuit thermocouple B Open circuit Pt 1000 Open circuit Pt 100 Open circuit Ni 1000 Open circuit Ni 100 Open circuit Cu 10
Maximum wiring resistance	500 Ohm 4 wires Pt 1000 500 Ohm 4 wires Ni 1000 50 Ohm 4 wires Pt 100 50 Ohm 4 wires Ni 100 50 Ohm 4 wires Cu 10 200 Ohm 3 wires Pt 1000 200 Ohm 3 wires Ni 1000 200 Ohm 2 wires Pt 1000 200 Ohm 2 wires Ni 1000 20 Ohm 3 wires Pt 100 20 Ohm 3 wires Ni 100 20 Ohm 3 wires Cu 10 20 Ohm 2 wires Pt 100 20 Ohm 2 wires Ni 100 20 Ohm 2 wires Cu 10
Measurement resolution	80/2exp14 mV +/- 80 mV 640/2exp14 mV +/- 640 mV 4000/2exp14 mV 4000 Ohm 40/2exp14 mV 400 Ohm 40/2exp14 mV +/- 40 mV 320/2exp14 mV +/- 320 mV 160/2exp14 mV +/- 160 mV 1280/2exp14 mV +/- 1.28 V 0.1 °C thermocouple U 0.1 °C thermocouple T 0.1 °C thermocouple S 0.1 °C thermocouple R 0.1 °C thermocouple N 0.1 °C thermocouple L 0.1 °C thermocouple K 0.1 °C thermocouple J 0.1 °C thermocouple E 0.1 °C thermocouple B 0.1 °C Pt 1000 0.1 °C Pt 100 0.1 °C Ni 1000 0.1 °C Ni 100 0.1 °C Cu 10
Maximum conversion value	+/- 102.5 % +/- 80 mV +/- 102.5 % +/- 640 mV +/- 102.5 % +/- 40 mV +/- 102.5 % +/- 320 mV +/- 102.5 % +/- 160 mV +/- 102.5 % +/- 1.28 V +/- 100 % 4000 Ohm +/- 100 % 400 Ohm
Status LED	1 LED red I/O 1 LED red ERR 1 LED per channel green channel diagnostic 1 LED green RUN
Product weight	0.135 kg
Current consumption	40 mA at 24 V DC 150 mA at 3.3 V DC

Environment

Ambient air temperature for operation	0...60 °C
Relative humidity	10...95 % without condensation
IP degree of protection	IP20
Protective treatment	TC

Modules Mounted on Racks

Dimensions

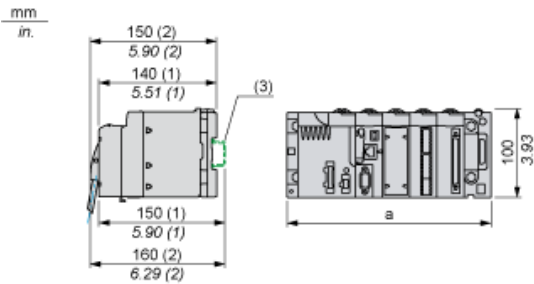

- (1) With removable terminal block (cage, screw or spring).
- (2) With FCN connector.
- (3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.


Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81

Wiring Diagram

Below example shows a probe configuration with:

- Channel 0/4: Thermocouple
- Channel 1/5: 2-wires RTD
- Channel 2/6: 3-wires RTD
- Channel 3/7: 4-wires RTD

Module Front view - cabling view

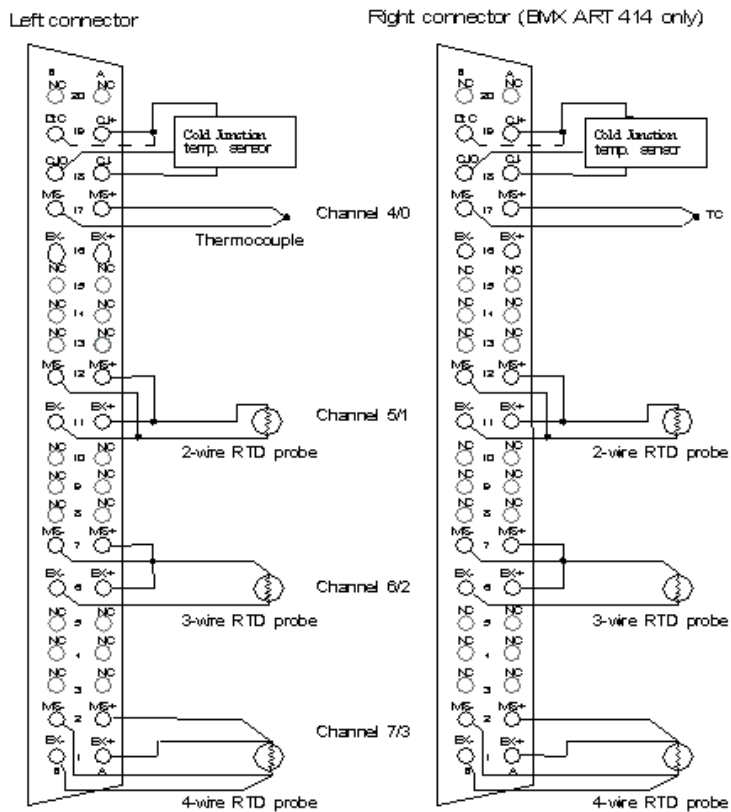

MS+ Thermocouple + input

MS- Thermocouple - input

EX+ RTD probe current generator + output

EX- RTD probe current generator - output

NC Not connected

DtC The CJC sensor detection input is connected to CJ+ if the sensor type is DS600. It is not connected (NC) if the sensor type is LM31.

NOTE: The CJC sensor is needed for TC only.