
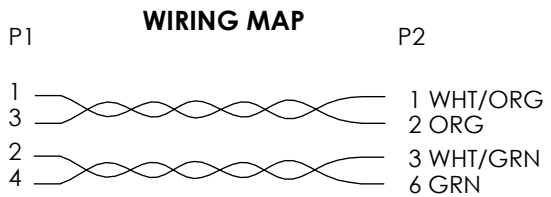


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	1/26/10	D.GRIFFIN
B	ECN4691: ADDED M12 CONNECTOR CALL-OUT	04/16/10	D.FP
C	ECN 6206: ADDED "D-CODED" FOR CLARIFICATION, REVISED WIRE MAP	6/11/12	D.FRISIELLO

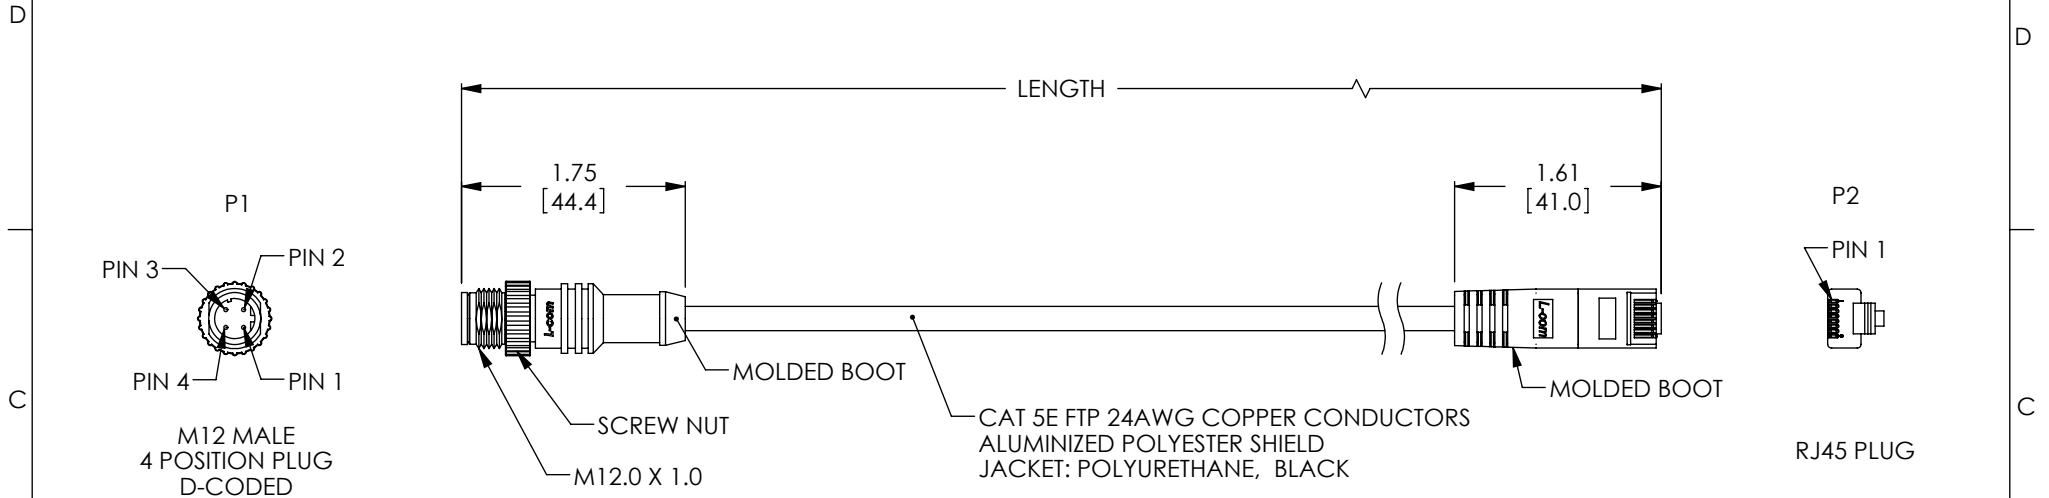

PART NUMBER	LENGTH	
	FEET	METERS
M12RJ454D-0.5	1.64	0.5
M12RJ454D-1	3.28	1
M12RJ454D-2	6.56	2
M12RJ454D-3	9.84	3
M12RJ454D-5	16.41	5

**NOTE:**

1. WATERPROOF RATING: IP68 (P1 ONLY)
2. MOLDED HOOD/BOOT: POLYURETHANE, BLACK
3. SCREW NUT: ZINC ALLOY, NICKEL PLATED
4. PINS/CONTACTS: COPPER ALLOY, GOLD PLATED
5. CABLE ASSEMBLIES INDIVIDUALLY PACKAGED IN A POLYBAG PER L-COM SPECIFICATION PS-0031.
6. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
7. CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY.

**RoHS Compliant** ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%  ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	APPROVALS DRAWN BY D. PARHAM CHECKED BY D. CASTRO APPROVED BY P. McNEIL	DATE 01/21/2010 01/25/2010 01/25/2010	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	CATEGORY <b>TELECOM/MODULAR</b>		PRODUCT DESCRIPTION <b>CA M12 TO RJ45 4 POS D</b>	
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>M12RJ454D</b>	REV. <b>C</b>
SCALE: NONE		CAD FILE: M12RJ454D.SLDDRW		SHEET 1 OF 1	