

Datasheet

EAS120 Series

120W External Power Supply

784-0603




Features:



- 120W external power supply
- Protections: Short circuit/ Overload/ Over voltage/ Over Temperature
- Input voltage range: 100 to 240VAC
- Fully enclosed plastic case
- Efficiency: Up to 90%
- ErP step2 compliant (level V)

Model						
Output	DC Voltage	12V	15V	20V	24V	48V
	Rated current	8.5A	7A	6A	5A	2.5A
	Current range	0-8.5A	0-7A	0-6A	0-5A	0-2.5A
	Rated Power	120W				
Input	Voltage range	100-240VAC				
	Frequency range	47-63Hz				
	Efficiency	Up to 90%				
Protections	Short circuit	Auto recovery				
Environment	Working temperature	0°C - 40°C				
Other	Weight	540.4g				
	Dimensions	167*67*35mm (L*W*H)				
Connector	Plug	DIN 4 Pin		2.5mm		


Standard plug (all models) : power DIN 4 pin with lock type, KYCON KPPX-4P equivalent

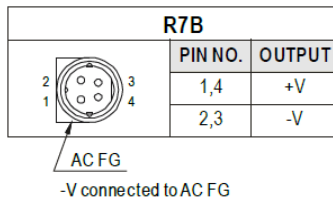


Standard plug (For 20V, 24V, 48V only)

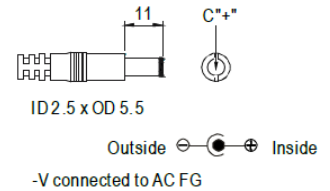



Derating Curve

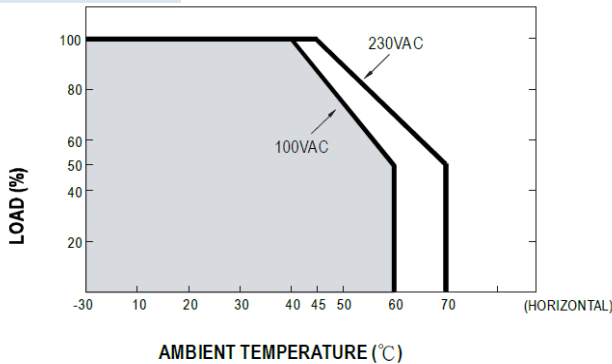

Static Characteristics

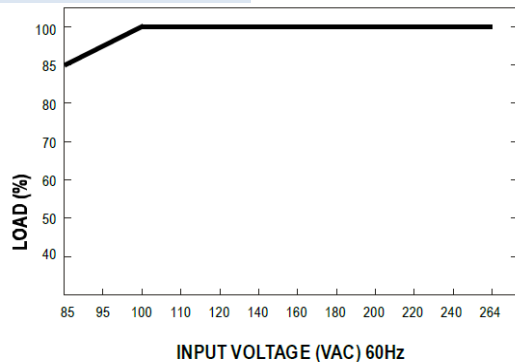

Mechanical Specification

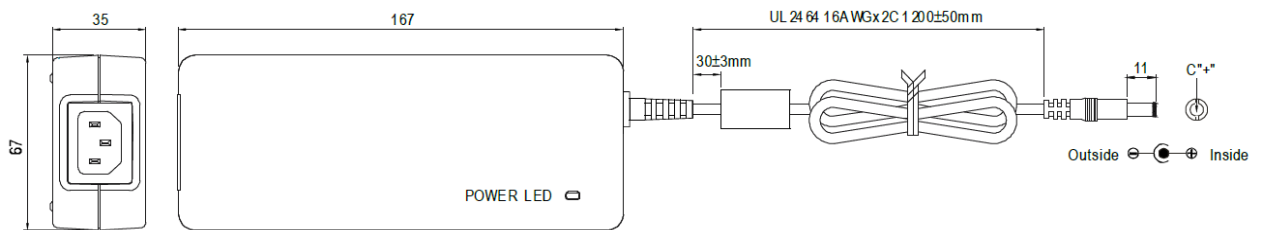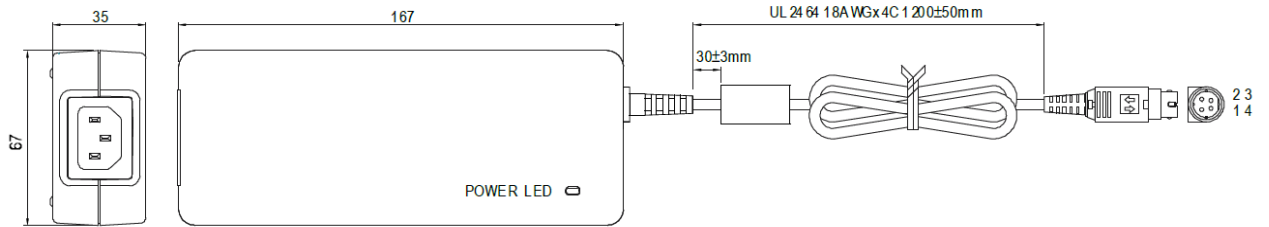

Plug Assignment