

Interface converter - PSM-ME-RS232/RS232-P - 2744461

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Interface converter, for the isolation of RS-232 (V.24) interfaces, 4 channels, rail-mountable

Product Features

- Mounting on standard EN DIN rails
- In the case of variable cable lengths, the RS-232 connection on the field side can be established conveniently using plug-in screw terminal blocks
- High-quality 3-way isolation up to 2 kV (VCC // RS-232 // RS-232)
- Integrated surge protection with transient discharge to the DIN rail
- Maximum transmission speed of 115.2 kbps
- Transmission of TxD/RxD data channels and RTS/CTS control lines
- 24 V DC or AC power supply suitable for the control cabinet
- Active data transmission indicated by separate data indicators for the transmit and receive channels
-



Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	181.2 GRM
Custom tariff number	85176200
Country of origin	Germany

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	22.5 mm
Height	99 mm

Interface converter - PSM-ME-RS232/RS232-P - 2744461

Technical data

Dimensions

Depth	118.6 mm
-------	----------

Ambient conditions

Ambient temperature (operation)	0 °C ... 55 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (non-condensing)
Altitude	5000 m (For restrictions see manufacturer's declaration)
Degree of protection	IP20
Noise immunity	EN 61000-6-2:2005

General

Transmission channels	4 (2/2), RxD, TxD, RTS, CTS; full duplex
Bit delay	< 3 µs
Bit distortion	< 5 %
Electrical isolation	VCC // V.24 (RS-232) (A) // V.24 (RS-232) (B)
Test voltage data interfaces	2 kV AC
Test voltage data interface/power supply	2 kV AC
	2 kV
Electromagnetic compatibility	Conformance with EMC Directive 2004/108/EC
Noise emission	EN 61000-6-3
Net weight	123.18 g
Housing material	PA
Color	green
MTBF	2263 Years (Telcordia standard, 25°C temperature, 21% operating cycle (5 days a week, 8 hours a day))
	438 Years (Telcordia standard, 40°C temperature, 34.25% operating cycle (5 days a week, 12 hours a day))
Conformance	CE-compliant
UL, USA / Canada	508 recognized
	Class I, Div. 2, Groups A, B, C, D
	Class I, Zone 2, AEx nA IIC T4
	Class I, Zone 2, Ex nA IIC T4 Gc X

Power supply

Nominal supply voltage	24 V AC/DC ±20 %
Supply voltage range	19.2 V AC/DC ... 28.8 V AC/DC
Typical current consumption	40 mA (24 V DC)

Serial interface

Interface 1	V.24 (RS-232) interface in acc. with ITU-T V.28, EIA/TIA-232, DIN 66259-1
-------------	---

Interface converter - PSM-ME-RS232/RS232-P - 2744461

Technical data

Serial interface

Connection method	D-SUB-9 plug
Transmission length	15 m (twisted pair)
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	13
Serial transmission speed	115.2 kbps
Interface 2	V.24 (RS-232) interface in acc. with ITU-T V.28, EIA/TIA-232, DIN 66259-1
Connection method	Pluggable screw connection
Transmission length	15 m (twisted pair)
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	13

Classifications

eCl@ss

eCl@ss 4.0	27250312
eCl@ss 4.1	27250312
eCl@ss 5.0	27242208
eCl@ss 5.1	27242208
eCl@ss 6.0	27242208
eCl@ss 7.0	27242208
eCl@ss 8.0	27242208

ETIM

ETIM 2.0	EC000310
ETIM 3.0	EC000310
ETIM 4.0	EC000310
ETIM 5.0	EC000310

UNSPSC

UNSPSC 6.01	30211506
UNSPSC 7.0901	39121008
UNSPSC 11	39121008
UNSPSC 12.01	39121008
UNSPSC 13.2	43201553

Interface converter - PSM-ME-RS232/RS232-P - 2744461

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / DNV / EAC / cULus Recognized


Ex Approvals

UL Recognized / cUL Recognized / UL Listed / cUL Listed / cULus Recognized / cULus Listed

Approvals submitted

Approval details

UL Recognized 

cUL Recognized 

DNV

EAC

cULus Recognized 

Accessories

Accessories

Adapter cable

Interface converter - PSM-ME-RS232/RS232-P - 2744461

Accessories

Data cable - PSM-KA 9 SUB 25/BB/2METER - 2761059



RS-232 cable, 9-pos. D-SUB socket 25-pos on D-SUB socket

Data cable - PSM-KA9SUB9/BB/2METER - 2799474



RS-232 cable, 9-pos. D-SUB socket on 9-pos. D-SUB socket, 9-wire, 1:1

Mounting material

Components of electronic housing - ME-SAS - 2853899



Shield connection clamp for printed circuit terminal block

Screwdriver tools

Screwdriver - SZF 1-0,6X3,5 - 1204517




Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Drawings


Interface converter - PSM-ME-RS232/RS232-P - 2744461

Application drawing

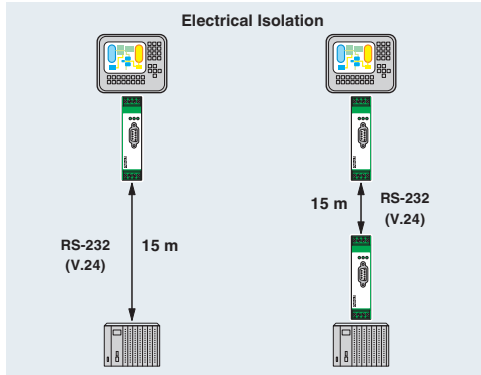

Electrical isolation

Application drawing

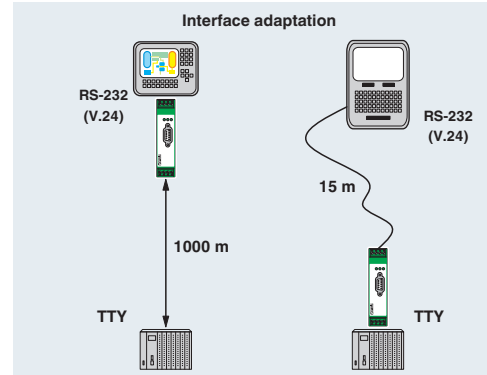

Interface adaptation