


# Data Sheet

## Alarm 8C SCR PVC

---

### Cross Section:

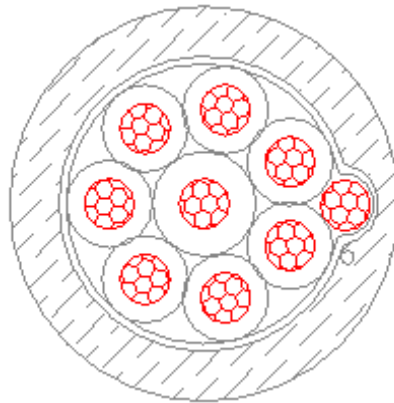

### Description:

**Rated Temperature (°C):** -20 ~ 80

**Rated Voltage (V):** 300

### Construction:

**Conductor:** Tinned Copper Claded Aluminium

**Conductor Dia. (mm):** TCCA0.19±0.008 x 7

**Insulation:** PVC

**Insulation Dia. (mm):** 1.00±0.08 x 7C

1.20±0.08 x 1C

**Al-Pet Shield**

**Coverage:** ≥115%

**Drain wire:** Tinned Copper Claded Aluminium

**Drain wire Dia. (mm):** TCCA0.19±0.008 x 7

**Nylon rip cord:** 150D

**Jacket:** PVC

**Outer Dia. (mm):** 4.60±0.2

### Colour:

**The color of the insulation:** green,yellow,white, black,blue,red,orange and brown

**The jacket color:** According to customer

### Marking:

According to customer

### Performance:

**Electrical Characteristics:**

**Max.Conductor DC Resistance at 20°C (Ω/Km) :**  
<177

**Min.Insulation DC Resistance at 20°C (MΩ  
\*KM) :** >200

