



DIMENSIONS:	
A	2.813" ±0.063
B	1.600" ±0.125
C	1.683" ±0.063
D	2.375" ±0.063
E	0.826" ±0.063
F	1.951" ±0.063
G	0.187" ±0.015

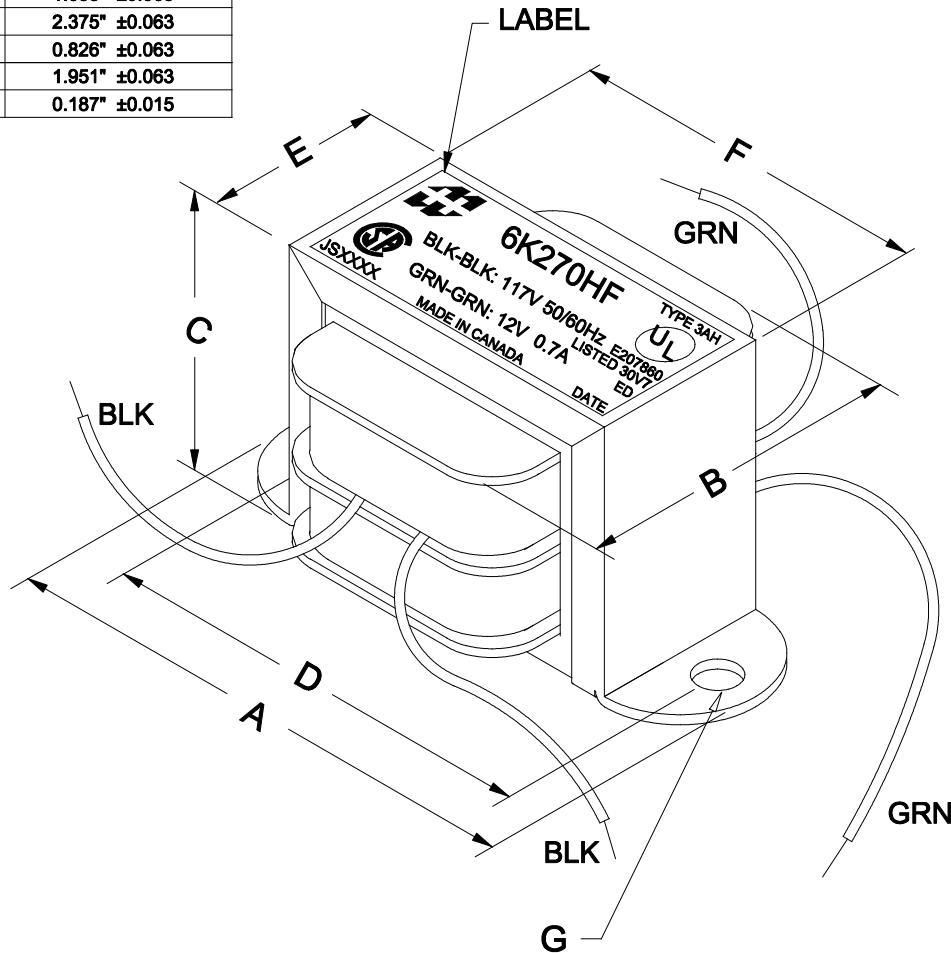

NOTE: ALL LEADS 9" OUT MIN. STRIPPED 0.5"

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
Iex	@ 117V, 60Hz, BLK - BLK	31mA Max.
Sec. N.L.V	@ 117V, 60Hz, BLK - BLK	
	GRN - GRN =	13.92V ±2%
DCR	@ 20°C, BLK - BLK =	72.06 Ω ±20%
	@ 20°C, GRN - GRN =	1.057 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION		
0	RELEASED.	C.I. 06/12/15	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		
			PH # (519) 886-6181	FAX # (519) 886-9540	
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER
			DATE: 06/12/15	APP'D. BY:	DWG. NO. 6K270HF
				DIMENSIONS: IN(X) MM ()	