



## Main

Range of product	Harmony XVC6
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	1 illuminated unit
Sound signalling	Buzzer
Mounting diameter	2.36 in (60 mm)
Component name	XVC
Light source	Red LED steady or flashing
[Us] rated supply voltage	100...240 V
Supply circuit type	AC
Noise level	70...85 dB (continuous or intermittent tone) at 1 m

## Complementary

Material	Polycarbonate (illuminated unit) ABS (acrylonitrile butadiene-styrene) (base unit) PBT + ABS (UL94-V0) (top cover)
Product mounting	On base
Cable cross section	0 in <sup>2</sup> (0.33 mm <sup>2</sup> ) 0 in <sup>2</sup> (0.83 mm <sup>2</sup> )
AWG gauge	AWG 18 AWG 22
Cable length	29.53 in (750 mm) 33.46 in (850 mm)
Marking	CE
[Uimp] rated impulse withstand voltage	4 kV
Current consumption	60 mA
Fundamental frequency	2.23 kHz
Flashing frequency	1 Hz
Product weight	1.08 lb(US) (0.49 kg)
Height	9.13 in (232 mm)

## Environment

standards	EN/IEC 60947-1 EN/IEC 60947-5-1
product certifications	UL
protective treatment	TC
ambient air temperature for storage	-31...158 °F (-35...70 °C)
ambient air temperature for operation	14...122 °F (-10...50 °C)
electrical shock protection class	Class I conforming to EN/IEC 61140
IP degree of protection	IP54 in flat surface installation conforming to EN/IEC 60529

## Offer Sustainability


Green Premium product	Green Premium product
Compliant - since 0808 - Schneider Electric declaration of conformity	Compliant - since 0808 - Schneider Electric declaration of conformity
Reference contains SVHC above the threshold - go to CaP for more details	Reference contains SVHC above the threshold
Available	Available
Need no specific recycling operations	Need no specific recycling operations

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Pre-assembled and Pre-wired Tower Light

### Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

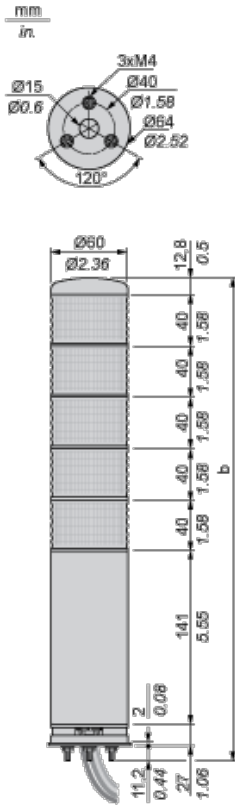

No. of illuminated units	b (mm)	b (in.)
1 stage	232	9.13
2 stages	272	10.71
3 stages	312	12.28
4 stages	352	13.86
5 stages	392	15.43

## Pre-assembled and Pre-wired Tower Light

### Mounting on Horizontal Support (Direct or with Fixing Plate)

Panel cut-out

