


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED FOR PRODUCTION	06/27/02	MCCORMICK
B	ECN3189: CN RELEASE	02/08/08	D. PARHAM
C	ECN 3797: DEFINED COLOR TO LIGHT GRAY, NEW FORMAT	1/19/09	D.FRISIELLO
D	ECN 4784: REVISE WIRE MAP AND ADDED NOTES	5/26/10	D.FRISIELLO

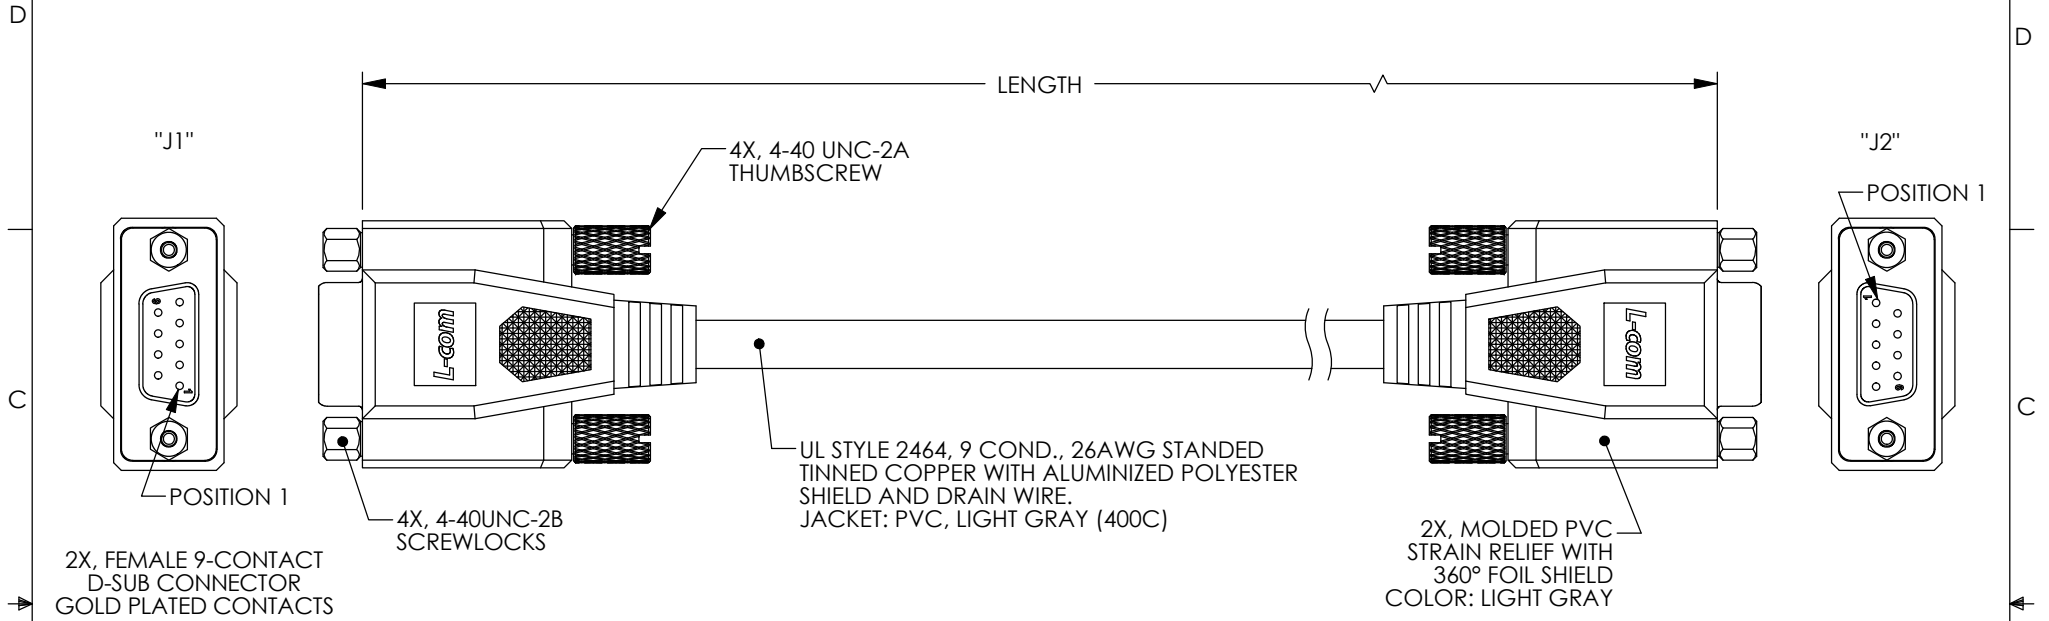

WIRING MAP		
"J1"	WIRE COLOR	"J2"
1 & 6	BLACK	4
2	GRAY	3
3	RED	2
4	GREEN	1 & 6
5	BROWN	5
7	ORANGE	8
8	YELLOW	7
SHELL	DRAIN WIRE	SHELL

MODEL NUMBER	LENGTH	
	FEET	METERS
CNULL9FF-5A	5.0	1.52
CNULL9FF-10A	10.0	3.05
CNULL9FF-25A	25.0	7.62

RoHS Compliant ✓

NOTES:
 PIN 9 NOT USED.
 CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 >12 [305] ≤ 60 [1524] = +2 [51] / -0 >60 [1524] ≤ 120 [3048] = +4 [102] / -0 >120 [3048] ≤ 300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS DRAWN BY MCCORMICK CHECKED BY DOUG PARHAM APPROVED BY R.CARRICK	DATE 6/27/2002 6/27/2002 6/27/2002	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY DATA CABLING	PRODUCT DESCRIPTION CABLE, DB9F/DB9F NULL MODEM
PROJECTION 	COLOR VARIATIONS MAY OCCUR CNULL-FS01	SIZE A	FSCM NO. 43321	DWG. NO. CNULL9FF-A	REV. D
		SCALE: NONE	CAD FILE: CNULL9FF-A.SLDDRW	SHEET 1 OF 1	